530

Imperial Size

Pitch 15 mm
H= 8,7 mm

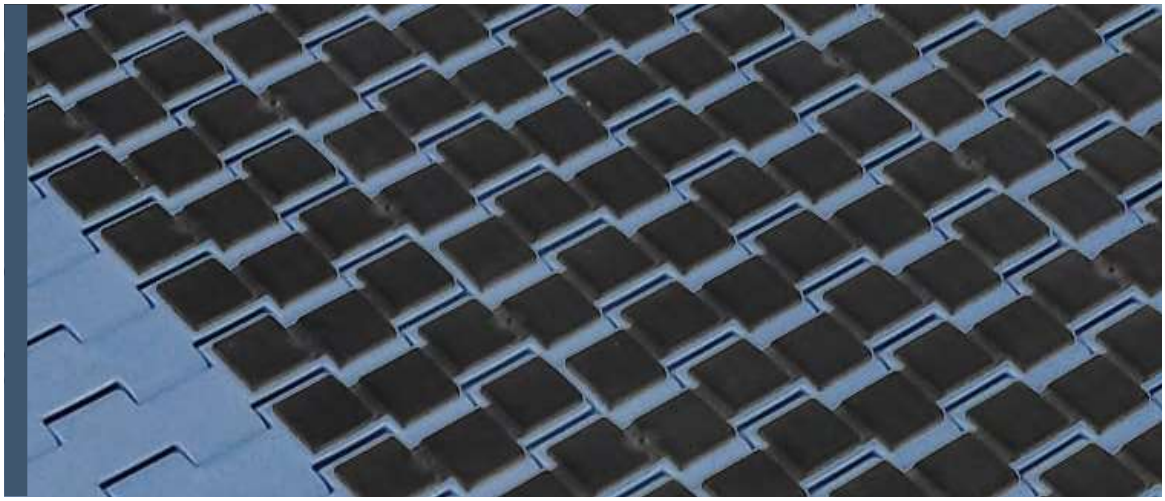

530 FT
530 FTT
530 GT
550 GT *Side indent*
530 LBP

530 FT

Tappeto Modulare 530 FT, H=8,7 M=3"
Modular Belt Series 530 FT, H=8,7 M=3" / Modulare Mattenkette 530 FT, H=8,7 M=3"

Imperial Size

CODE STRUCTURE GUIDE (Example)			
5321	01	0030	A
Series	*Material	Width	Version

pg. 222
pg. 420->428

Backflex radius min.: 25 mm

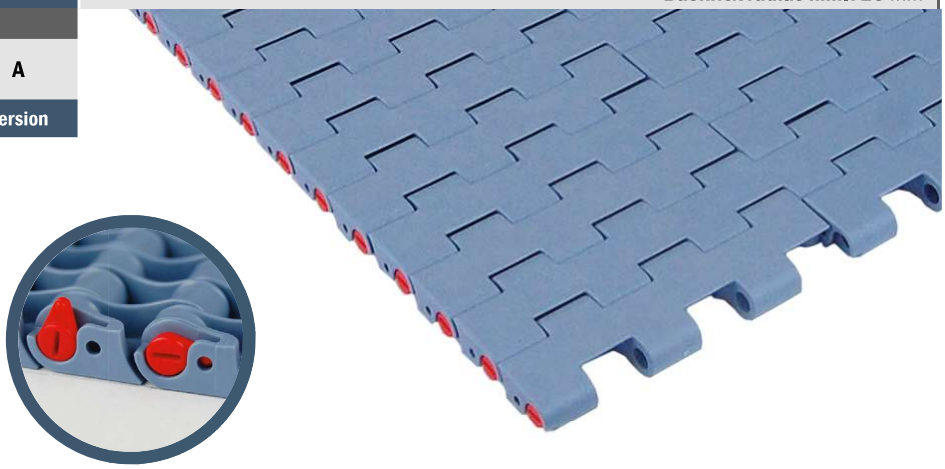

Version A - Standard

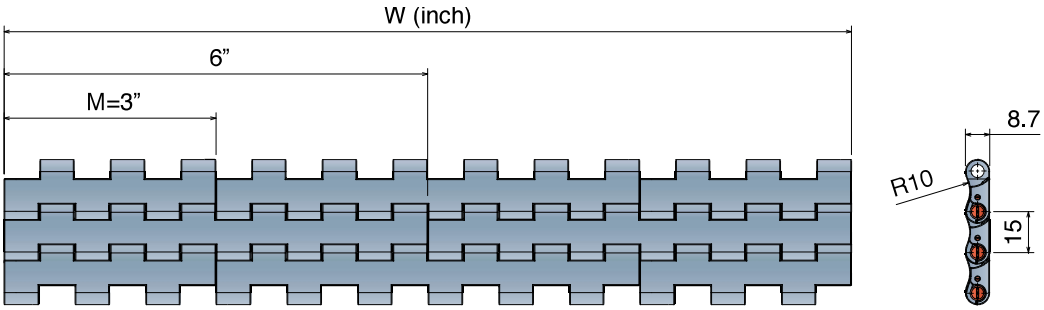

Version A - Standard

Series	Material	Width	Version
5321	*	0003	A
5321	*	0006	A
5321	*	0009	A
5321	*	0012	A
5321	*	0015	A
5321	*	0018	A
5321	*	0021	A
5321	*	0024	A
5321	*	0027	A
5321	*	0030	A
5321	*	0033	A
5321	*	0036	A
5321	*	0039	A
5321	*	0042	A
5321	*	0045	A
5321	*	0048	A
5321	*	0051	A
5321	*	0054	A

***Material**

LFA - Code 01
Low friction Acetal

Max w. load: 26000 N/m
Weight: 9,2 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MX - Code 03
Performance PBT

Max w. load: 21000 N/m
Weight: 9,0 kg/m²
Temp. range: dry -40÷120 °C, wet -40÷60 °C
Pin material: POM grey

MK - Code 08
Super Performance Acetal

Max w. load: 25000 N/m
Weight: 9,2 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MPX - Code 25
Lubricated Acetal

Max w. load: 26000 N/m
Weight: 9,2 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

DKM - Code 16
Aramide Reinforced Acetal

Max w. load: 26000 N/m
Weight: 9,2 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MWX - Code 17
Polyamide Composite

Max w. load: 26000 N/m
Weight: 9,5 kg/m²
Temp. range: dry -40÷104 °C, wet NR
Pin material: PBT white

530 FTT

Tappeto Modulare 530 FTT, H=8,7 M=3"
Modular Belt Series 530 FTT, H=8,7 M=3" / Modulare Mattenkette 530 FTT, H=8,7 M=3"

Imperial Size

CODE STRUCTURE GUIDE (Example)			
5326	01	0006	A
Series	*Material	Width	Version

pg. 222
pg. 420->428

Backflex radius min.: 25 mm

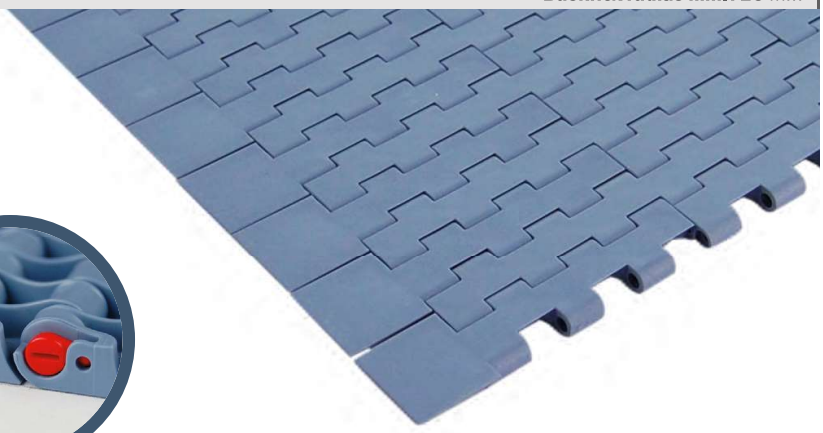

Version A - Standard

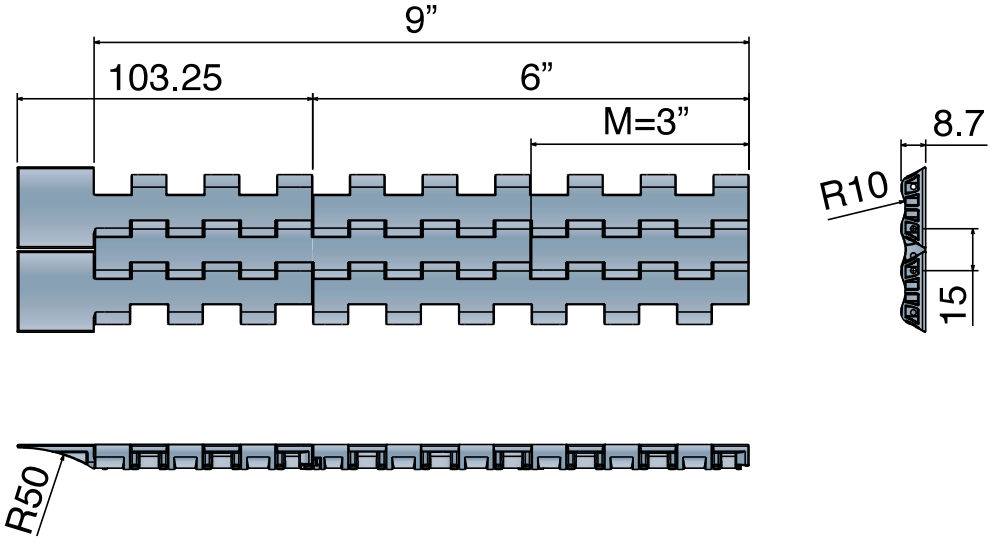

Version A - Standard

Series	Material	Width	Version
5326	*	0003	A
5326	*	0006	A
5326	*	0009	A

*Material

LFA - Code 01
Low friction Acetal

Max w. load:	26000 N/m
Weight:	9,2 kg/m²
Temp. range:	dry -40÷80 °C
	wet -40÷65 °C
Pin material:	PBT white

MX - Code 03
Performance PBT

Max w. load:	21000 N/m
Weight:	9,0 kg/m²
Temp. range:	dry -40÷120 °C
	wet -40÷60 °C
Pin material:	POM grey

MK - Code 08
Super Performance Acetal

Max w. load:	25000 N/m
Weight:	9,2 kg/m²
Temp. range:	dry -40÷80 °C
	wet -40÷65 °C
Pin material:	PBT white

MPX - Code 25
Lubricated Acetal

Max w. load:	26000 N/m
Weight:	9,2 kg/m²
Temp. range:	dry -40÷80 °C
	wet -40÷65 °C
Pin material:	PBT white

DKM - Code 16
Aramide Reinforced Acetal

Max w. load:	26000 N/m
Weight:	9,2 kg/m²
Temp. range:	dry -40÷80 °C
	wet -40÷65 °C
Pin material:	PBT white

MWX - Code 17
Polyamide Composite

Max w. load:	26000 N/m
Weight:	9,5 kg/m²
Temp. range:	dry -40÷104 °C
	wet NR
Pin material:	PBT white

530 GT

Tappeto Modulare 530 GT, H=8,7 M=3"
Modular Belt Series 530 GT, H=8,7 M=3" / Modulare Mattenkette 530 GT, H=8,7 M=3"

Imperial Size

CODE STRUCTURE GUIDE (Example)			
5323	01	0009	A
Series	*Material	Width	Version

pg. 222
pg. 420->428

Backflex radius min.: 30 mm



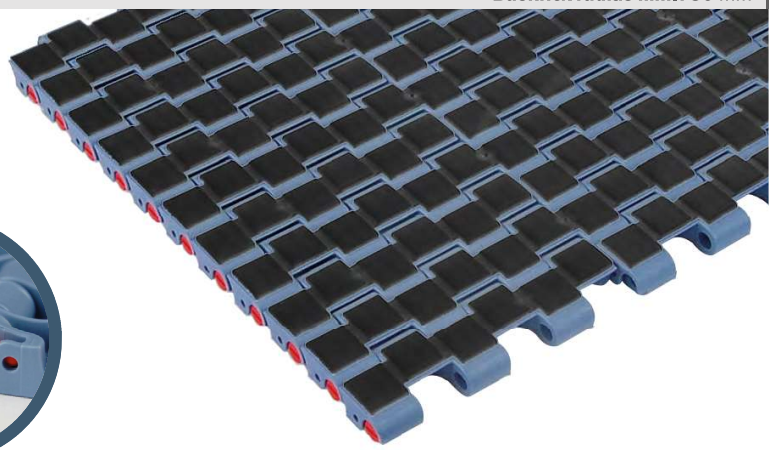

Version A - Standard

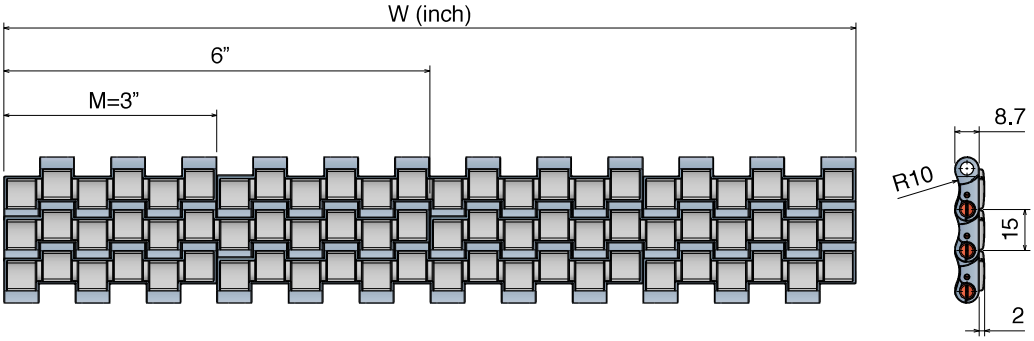

***Material**

LFA - Code 01
Low friction Acetal

Max w. load:	26000 N/m
Weight:	9,2 kg/m²
Temp. range:	dry -40÷80 °C wet -40÷65 °C
Pin material:	PBT white
Hardness of Grip top Rubber:	75 ShA

PP - Code 02
Polypropylene

Max w. load:	15500 N/m
Weight:	8,6 kg/m²
Temp. range:	dry 4÷80 °C wet 4÷65 °C
Pin material:	PP blu
Hardness of Grip top Rubber:	75 ShA

MX - Code 03
Performance PBT

Max w. load:	21000 N/m
Weight:	9,0 kg/m²
Temp. range:	dry -40÷120 °C wet -40÷60 °C
Pin material:	POM grey
Hardness of Grip top Rubber:	75 ShA

Version A - Standard

Series	Material	Width	Version
5323	*	0003	A
5323	*	0006	A
5323	*	0009	A
5323	*	0012	A
5323	*	0015	A
5323	*	0018	A
5323	*	0021	A
5323	*	0024	A
5323	*	0027	A
5323	*	0030	A
5323	*	0033	A
5323	*	0036	A
5323	*	0039	A
5323	*	0042	A
5323	*	0045	A
5323	*	0048	A
5323	*	0051	A
5323	*	0054	A

530 GT *Side indent*

Tappeto Modulare 530 GT, H=8,7 M=3"
Modular Belt Series 530 GT, H=8,7 M=3" / Modulare Mattenkette 530 GT, H=8,7 M=3"

Imperial Size

CODE STRUCTURE GUIDE (Example)			
5325	01	0027	A
Series	*Material	Width	Version

pg. 222
pg. 420->428

Backflex radius min.: 30 mm



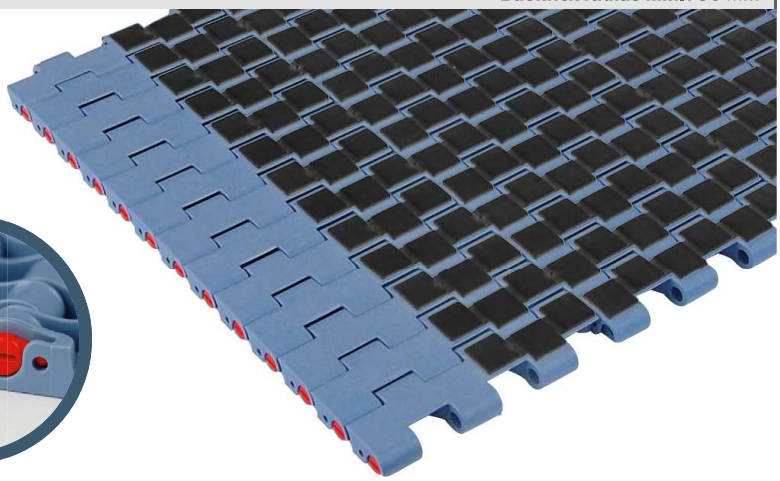

Version A - Standard

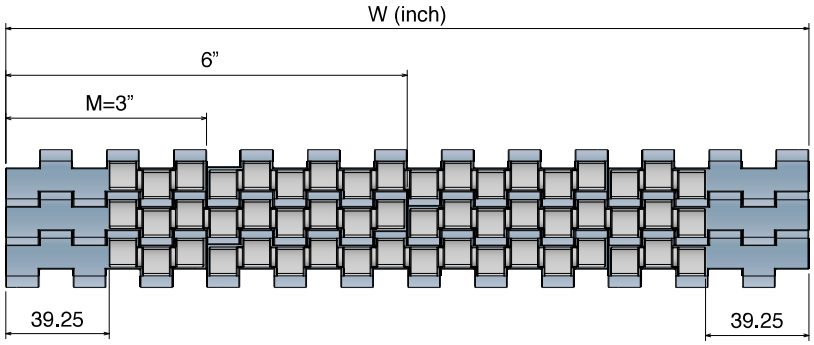



***Material**

LFA - Code 01
Low friction Acetal

Max w. load:	26000 N/m
Weight:	9,2 kg/m²
Temp. range:	dry -40÷80 °C wet -40÷65 °C
Pin material:	PBT white
Hardness of Grip top Rubber:	75 ShA

PP - Code 02
Polypropylene

Max w. load:	15500 N/m
Weight:	8,6 kg/m²
Temp. range:	dry 4÷80 °C wet 4÷65 °C
Pin material:	PP blu
Hardness of Grip top Rubber:	75 ShA

MX - Code 03
Performance PBT

Max w. load:	21000 N/m
Weight:	9,0 kg/m²
Temp. range:	dry -40÷120 °C wet -40÷60 °C
Pin material:	POM grey
Hardness of Grip top Rubber:	75 ShA

Version A - Standard

Series	Material	Width	Version
5325	*	0009	A
5325	*	0012	A
5325	*	0015	A
5325	*	0018	A
5325	*	0021	A
5325	*	0024	A
5325	*	0027	A
5325	*	0030	A
5325	*	0033	A
5325	*	0036	A
5325	*	0039	A
5325	*	0042	A
5325	*	0045	A
5325	*	0048	A
5325	*	0051	A
5325	*	0054	A

530 LBP

Tappeto Modulare 530 LBP, H=8,7 M=3"
Modular Belt Series 530 LBP, H=8,7 M=3" / Modulare Mattenkette 530 LBP, H=8,7 M=3"

Imperial Size

CODE STRUCTURE GUIDE (Example)			
5324	01	0012	A
Series	*Material	Width	Version

pg. 222
pg. 420->428

Backflex radius min.: 25 mm

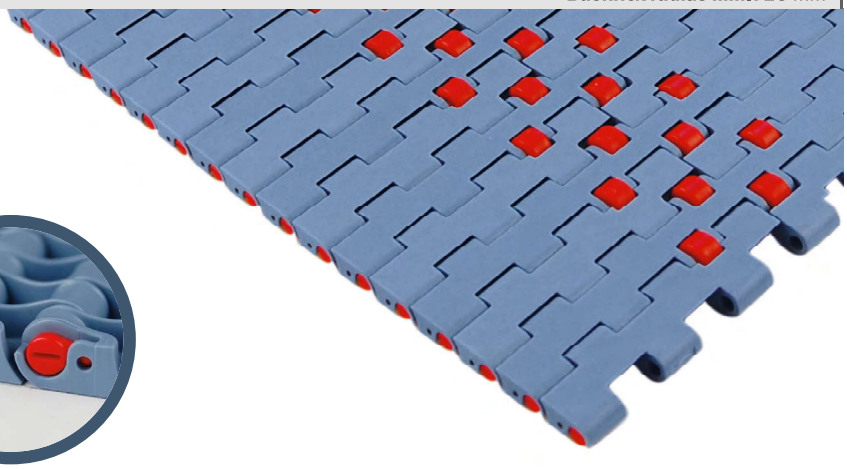

Version A - Standard

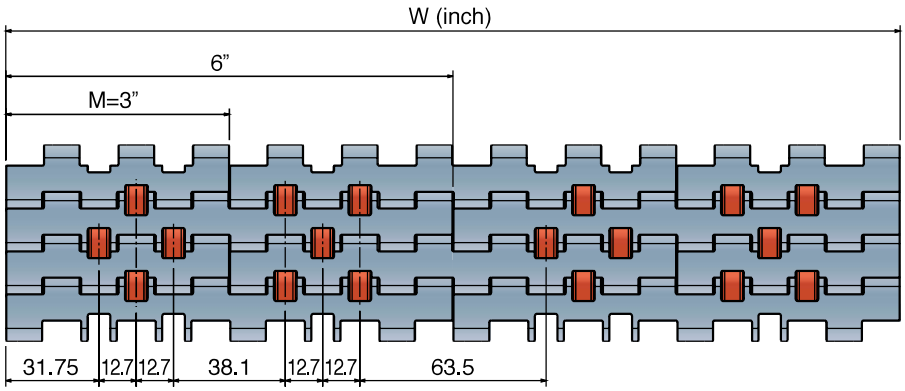



*Material

LFA - Code 01
Low friction Acetal

Max w. load:	26000 N/m
Weight:	9,2 kg/m²
Temp. range:	dry -40÷80 °C
	wet -40÷65 °C
Pin material:	PBT white
Hardness:	75 ShA

Version A - Standard

Series	Material	Width	Version
5324	*	0006	A
5324	*	0012	A
5324	*	0018	A
5324	*	0024	A
5324	*	0030	A
5324	*	0036	A
5324	*	0042	A
5324	*	0048	A
5324	*	0054	A

550

Metric Size

Pitch 25,4 mm
H= 8,7 mm

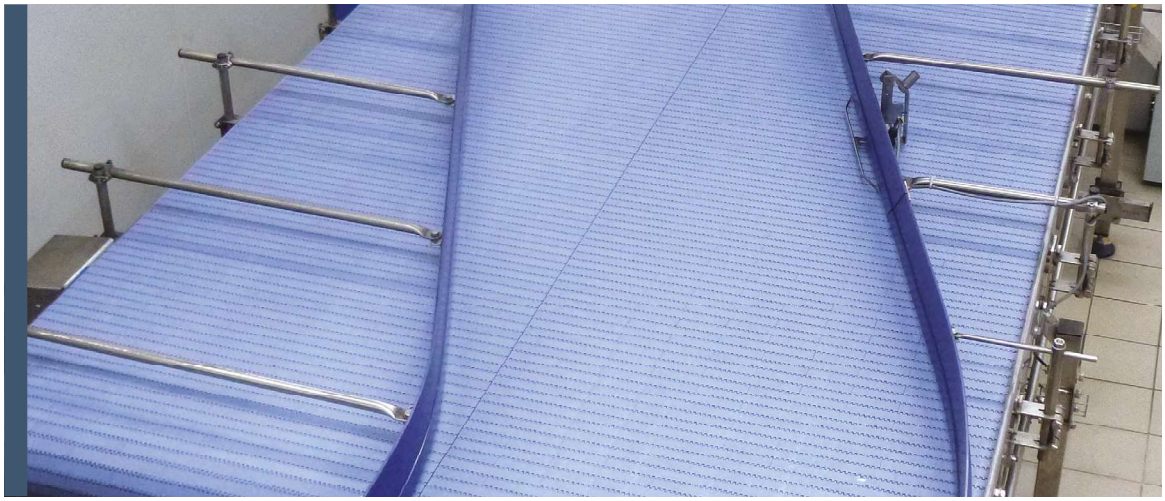

550 FT
550 *One track Belt*
550 FTT
550 FG
550 FG *One track Belt*

550 GT
550 GT *Side indent*

550 FT

Tappeto Modulare 550 FT, H=8,7 M=85
Modular Belt Series 550 FT, H=8,7 M=85 / Modulare Mattenkette 550 FT, H=8,7 M=85

Metric Size

CODE STRUCTURE GUIDE (Example)			
5221	08	0255	A
Series	*Material	Width	Version

pg. 224-225
pg. 420->428

Backflex radius min.: 25 mm

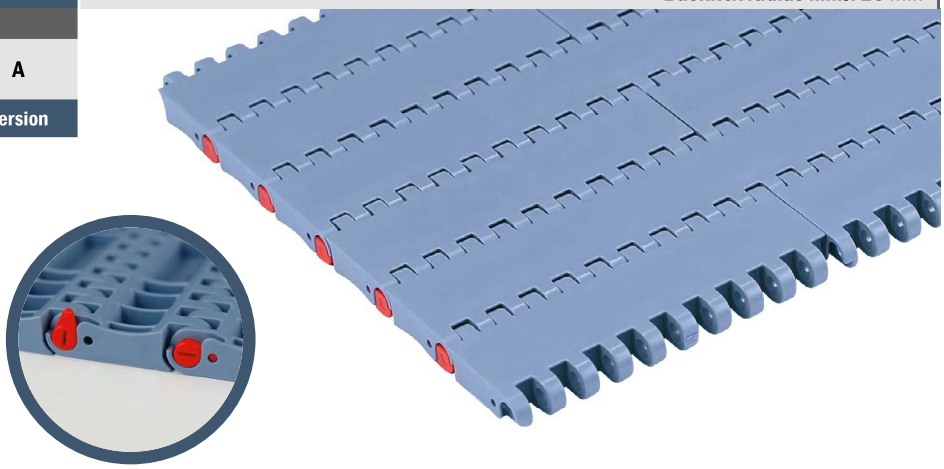

Version A - Standard

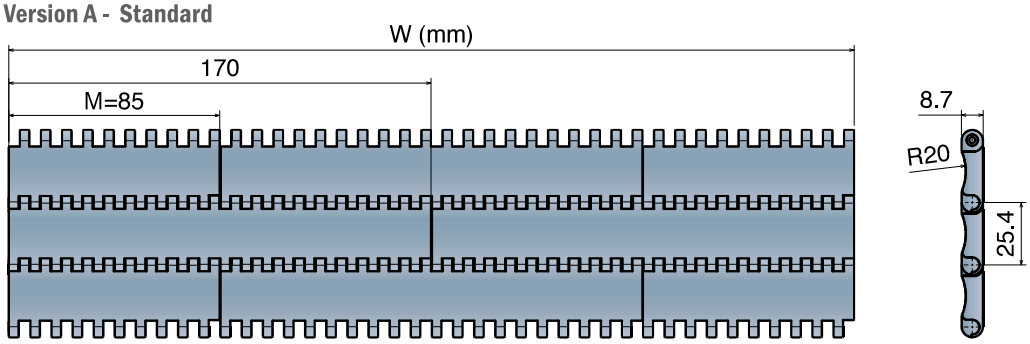

Version B - With 1 Positioner

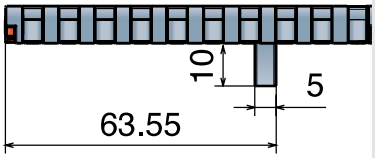

Version C - With 2 Positioner

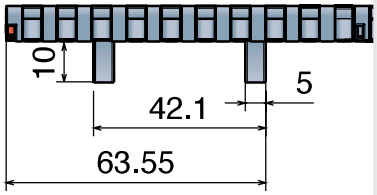

***Material**

LFA - Code 01
Low friction Acetal

Max w. load: 27500 N/m
Weight: 8,5 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MX - Code 03
Performance PBT

Max w. load: 22000 N/m
Weight: 8,2 kg/m²
Temp. range: dry -40÷120 °C, wet -40÷60 °C
Pin material: POM grey

MK - Code 08
Super Performance Acetal

Max w. load: 26500 N/m
Weight: 8,5 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MPX - Code 25
Lubricated Acetal

Max w. load: 27500 N/m
Weight: 8,5 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

DKM - Code 16
Aramide Reinforced Acetal

Max w. load: 27500 N/m
Weight: 8,5 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MWX - Code 17
Polyamide Composite

Max w. load: 27500 N/m
Weight: 8,9 kg/m²
Temp. range: dry -40÷104 °C, wet NR
Pin material: PBT white

Version A - Standard

Series	Material	Width	Version
5221	*	0085	A
5221	*	0170	A
5221	*	0255	A
5221	*	0340	A
5221	*	0425	A
5221	*	0510	A
5221	*	0595	A
5221	*	0680	A
5221	*	0765	A
5221	*	0850	A
5221	*	0935	A
5221	*	1020	A
5221	*	1105	A
5221	*	1190	A
5221	*	1275	A
5221	*	1360	A
5221	*	1445	A
5221	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5221	*	0085	B
5221	*	0170	B
5221	*	0255	B
5221	*	0340	B
5221	*	0425	B
5221	*	0510	B
5221	*	0595	B
5221	*	0680	B
5221	*	0765	B
5221	*	0850	B
5221	*	0935	B
5221	*	1020	B
5221	*	1105	B
5221	*	1190	B
5221	*	1275	B
5221	*	1360	B
5221	*	1445	B
5221	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5221	*	0085	C
5221	*	0170	C
5221	*	0255	C
5221	*	0340	C
5221	*	0425	C
5221	*	0510	C
5221	*	0595	C
5221	*	0680	C
5221	*	0765	C
5221	*	0850	C
5221	*	0935	C
5221	*	1020	C
5221	*	1105	C
5221	*	1190	C
5221	*	1275	C
5221	*	1360	C
5221	*	1445	C
5221	*	1530	C

550 FT *One track Belt*

Tappeto Modulare 550 FT, H=8,7 K330

Modular Belt Series 550 FT, H=8,7 K330 / Modulare Mattenkette 550 FT, H=8,7 K330

Metric Size

Backflex radius min.: 25 mm

CODE STRUCTURE GUIDE (Example)			
5221	03	9330	A
Series	*Material	Width	Version

pg. 224-225
pg. 420->428

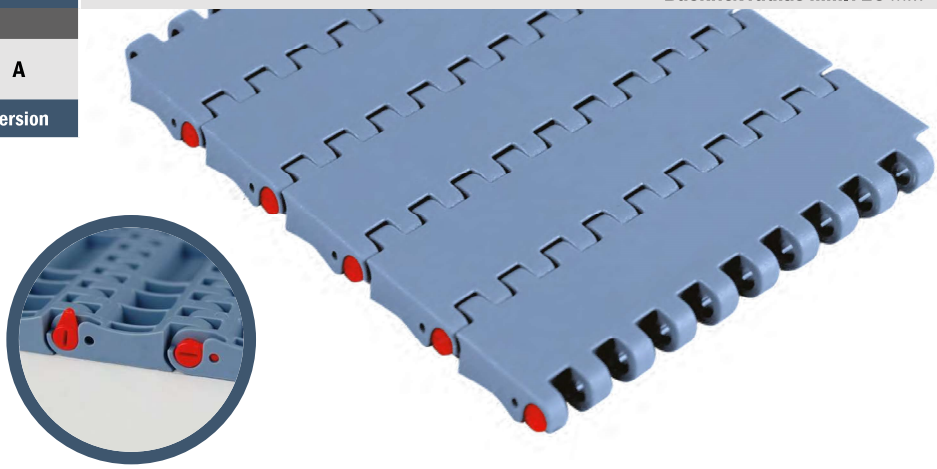

*Material

LFA - Code 01
Low friction Acetal

Max w. load:	27500 N/m
Weight:	8,5 kg/m²
Temp. range:	dry -40÷80 °C wet -40÷65 °C
Pin material:	PBT white

MX - Code 03
Performance PBT

Max w. load:	22000 N/m
Weight:	8,2 kg/m²
Temp. range:	dry -40÷120 °C wet -40÷60 °C
Pin material:	POM grey

MK - Code 08
Super Performance Acetal

Max w. load:	26500 N/m
Weight:	8,5 kg/m²
Temp. range:	dry -40÷80 °C wet -40÷65 °C
Pin material:	PBT white

MPX - Code 25
Lubricated Acetal

Max w. load:	27500 N/m
Weight:	8,5 kg/m²
Temp. range:	dry -40÷80 °C wet -40÷65 °C
Pin material:	PBT white

DKM - Code 16
Aramide Reinforced Acetal

Max w. load:	27500 N/m
Weight:	8,5 kg/m²
Temp. range:	dry -40÷80 °C wet -40÷65 °C
Pin material:	PBT white

MWX - Code 17
Polyamide Composite

Max w. load:	27500 N/m
Weight:	8,9 kg/m²
Temp. range:	dry -40÷104 °C wet NR
Pin material:	PBT white

Version A - Standard

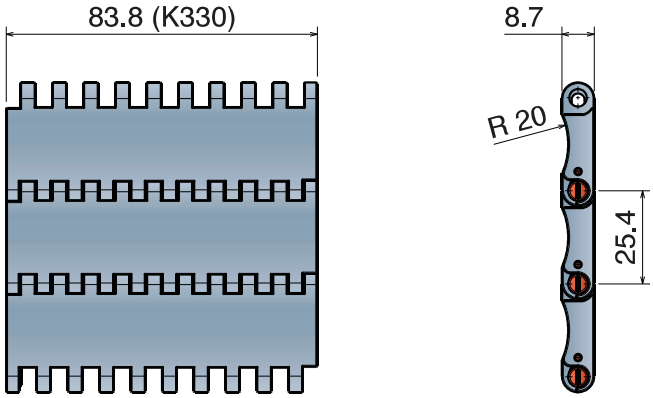

Version C - With 2 Positioner

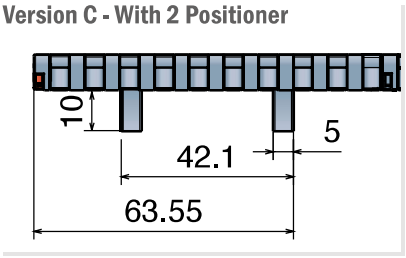

Version A - Standard

Series	Material	Width	Version
5221	*	9330	A

Version C - With 2 Positioners

Series	Material	Width	Version
5221	*	9330	C

550 FTT

Tappeto Modulare 550 FTT, H=8,7 M=85
Modular Belt Series 550 FTT, H=8,7 M=85 / Modulare Mattenkette 550 FTT, H=8,7 M=85

Metric Size

CODE STRUCTURE GUIDE (Example)			
5226	03	0255	CN
Series	*Material	Width	Version

pg. 224-225
pg. 420->428

Backflex radius min.: 25 mm

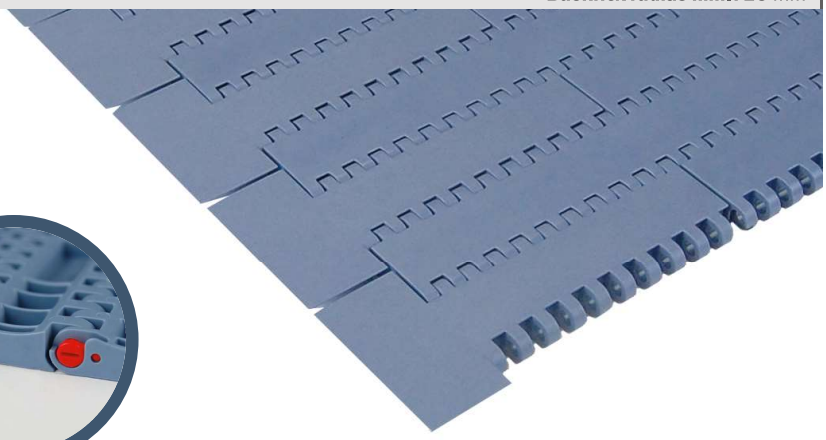

***Material**

LFA - Code 01
Low friction Acetal

Max w. load: 27500 N/m
Weight: 8,5 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MX - Code 03
Performance PBT

Max w. load: 22000 N/m
Weight: 8,2 kg/m²
Temp. range: dry -40÷120 °C, wet -40÷60 °C
Pin material: POM grey

MK - Code 08
Super Performance Acetal

Max w. load: 26500 N/m
Weight: 8,5 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MPX - Code 25
Lubricated Acetal

Max w. load: 27500 N/m
Weight: 8,5 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

DKM - Code 16
Aramide Reinforced Acetal

Max w. load: 27500 N/m
Weight: 8,5 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MWX - Code 17
Polyamide Composite

Max w. load: 27500 N/m
Weight: 8,9 kg/m²
Temp. range: dry -40÷104 °C, wet NR
Pin material: PBT white

Version C

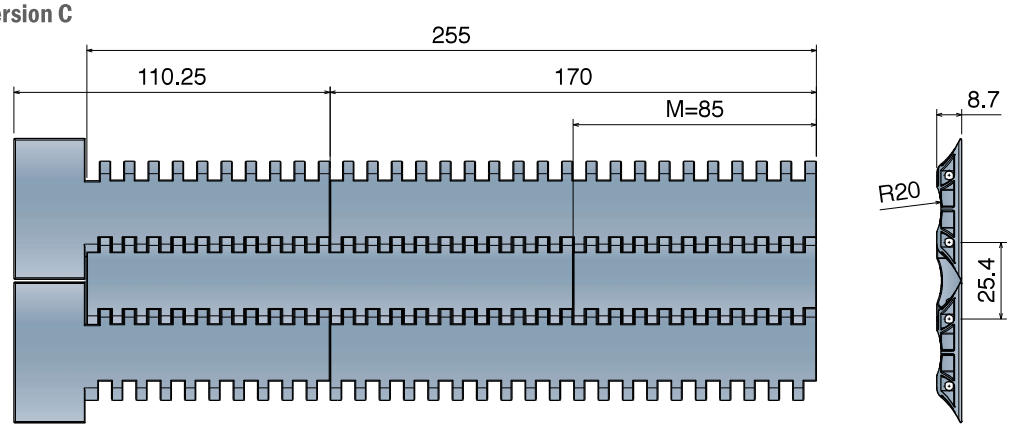

Version CN - Near

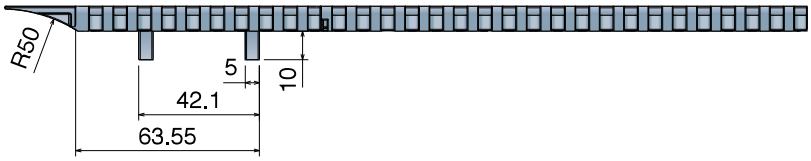

Version CO - Opposite

Version C

Series	Material	Width	Version
5226	*	0085	C

Version CN - Near

Series	Material	Width	Version
5226	*	0170	CN
5226	*	0255	CN

Version CO - Opposite

Series	Material	Width	Version
5226	*	0170	CO
5226	*	0255	CO

550 FG

Tappeto Modulare 550 FG, H=8,7 M=85
Modular Belt Series 550 FG, H=8,7 M=85 / Modulare Mattenkette 550 FG, H=8,7 M=85

Metric Size

CODE STRUCTURE GUIDE (Example)			
5222	01	0850	C
Series	*Material	Width	Version

Backflex radius min.: 25 mm

pg. 224-225
pg. 420->428

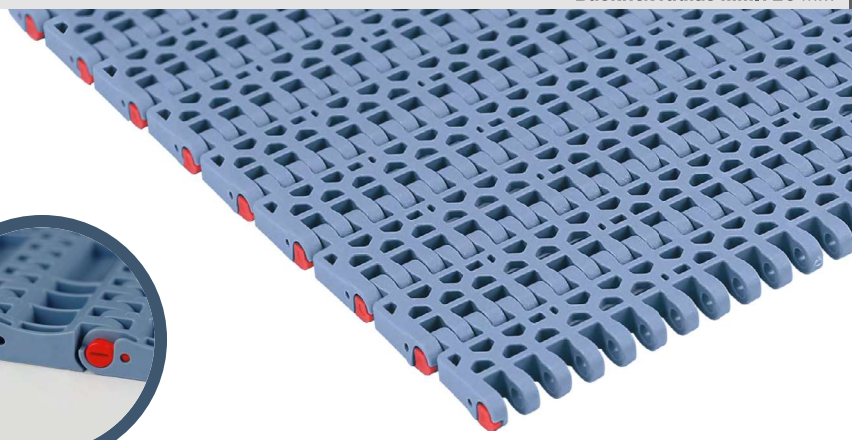

Version A - Standard

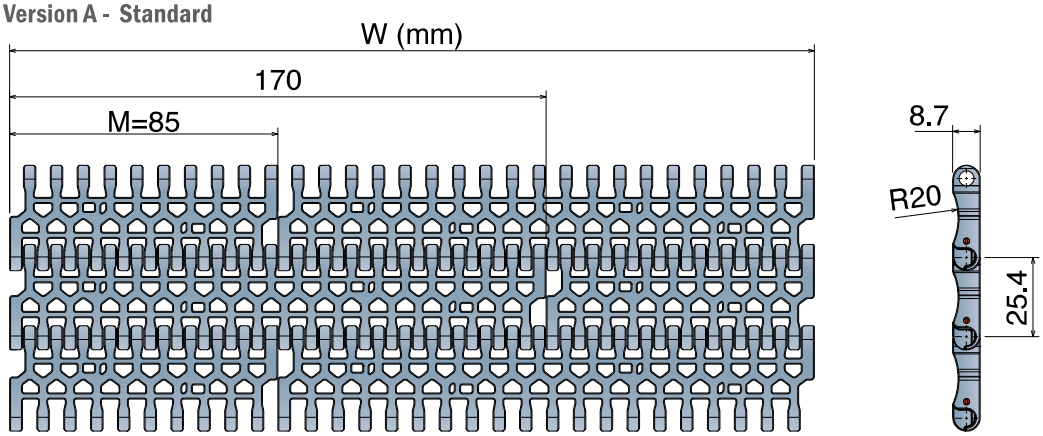

Version B - With 1 Positioner

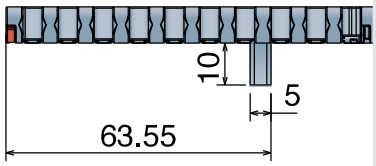

Version C - With 2 Positioner

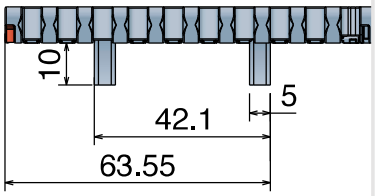

***Material**

LFA - Code 01
Low friction Acetal

Max w. load:	27500 N/m
Weight:	7,0 kg/m²
Temp. range:	dry -40÷80 °C wet -40÷65 °C
Pin material:	PBT white

MX - Code 03
Performance PBT

Max w. load:	22000 N/m
Weight:	6,7 kg/m²
Temp. range:	dry -40÷120 °C wet -40÷60 °C
Pin material:	POM grey

MK - Code 08
Super Performance Acetal

Max w. load:	26500 N/m
Weight:	7,0 kg/m²
Temp. range:	dry -40÷80 °C wet -40÷65 °C
Pin material:	PBT white

MPX - Code 25
Lubricated Acetal

Max w. load:	27500 N/m
Weight:	7,0 kg/m²
Temp. range:	dry -40÷80 °C wet -40÷65 °C
Pin material:	PBT white

DKM - Code 16
Aramide Reinforced Acetal

Max w. load:	27500 N/m
Weight:	7,0 kg/m²
Temp. range:	dry -40÷80 °C wet -40÷65 °C
Pin material:	PBT white

MWX - Code 17
Polyamide Composite

Max w. load:	27500 N/m
Weight:	7,3 kg/m²
Temp. range:	dry -40÷104 °C wet NR
Pin material:	PBT white

Version A - Standard

Series	Material	Width	Version
5222	*	0085	A
5222	*	0170	A
5222	*	0255	A
5222	*	0340	A
5222	*	0425	A
5222	*	0510	A
5222	*	0595	A
5222	*	0680	A
5222	*	0765	A
5222	*	0850	A
5222	*	0935	A
5222	*	1020	A
5222	*	1105	A
5222	*	1190	A
5222	*	1275	A
5222	*	1360	A
5222	*	1445	A
5222	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5222	*	0085	B
5222	*	0170	B
5222	*	0255	B
5222	*	0340	B
5222	*	0425	B
5222	*	0510	B
5222	*	0595	B
5222	*	0680	B
5222	*	0765	B
5222	*	0850	B
5222	*	0935	B
5222	*	1020	B
5222	*	1105	B
5222	*	1190	B
5222	*	1275	B
5222	*	1360	B
5222	*	1445	B
5222	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5222	*	0085	C
5222	*	0170	C
5222	*	0255	C
5222	*	0340	C
5222	*	0425	C
5222	*	0510	C
5222	*	0595	C
5222	*	0680	C
5222	*	0765	C
5222	*	0850	C
5222	*	0935	C
5222	*	1020	C
5222	*	1105	C
5222	*	1190	C
5222	*	1275	C
5222	*	1360	C
5222	*	1445	C
5222	*	1530	C

550 FG One track Belt

Tappeto Modulare 550 FG, H=8,7 K330

Modular Belt Series 550 FG, H=8,7 K330 / Modulare Mattenkette 550 FG, H=8,7 K330

Metric Size

CODE STRUCTURE GUIDE (Example)			
5222	01	9330	A
Series	*Material	Width	Version

pg. 224-225

pg. 420->428

Backflex radius min.: 25 mm



Version A - Standard

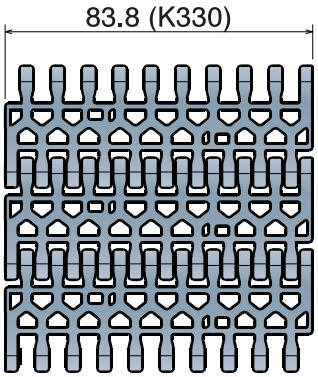

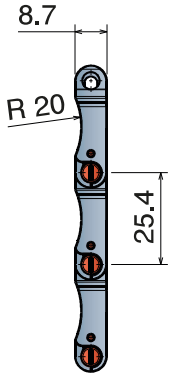

Version C - With 2 Positioner

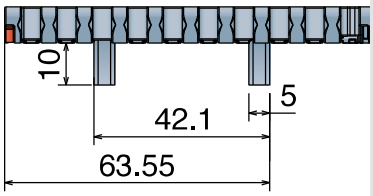

Version A - Standard

Series	Material	Width	Version
5222	*	9330	A

Version C - With 2 Positioners

Series	Material	Width	Version
5222	*	9330	C

***Material**

LFA - Code 01
Low friction Acetal

Max w. load: 27500 N/m
Weight: 7,0 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MX - Code 03
Performance PBT

Max w. load: 22000 N/m
Weight: 6,7 kg/m²
Temp. range: dry -40÷120 °C, wet -40÷60 °C
Pin material: POM grey

MK - Code 08
Super Performance Acetal

Max w. load: 26500 N/m
Weight: 7,0 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MPX - Code 25
Lubricated Acetal

Max w. load: 27500 N/m
Weight: 7,0 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

DKM - Code 16
Aramide Reinforced Acetal

Max w. load: 27500 N/m
Weight: 7,0 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MWX - Code 17
Polyamide Composite

Max w. load: 27500 N/m
Weight: 7,3 kg/m²
Temp. range: dry -40÷104 °C, wet NR
Pin material: PBT white

550 GT

Tappeto Modulare 550 GT, H=8,7 M=85
Modular Belt Series 550 GT, H=8,7 M=85 / Modulare Mattenkette 550 GT, H=8,7 M=85

Metric Size

CODE STRUCTURE GUIDE (Example)			
5223	02	1020	A
Series	*Material	Width	Version

pg. 224-225
pg. 420->428

Backflex radius min.: 30 mm

***Material**

LFA - Code 01
Low friction Acetal

Max w. load:	27500 N/m
Weight:	10,1 kg/m²
Temp. range:	dry -40÷80 °C wet -40÷65 °C
Pin material:	PBT white
Hardness of Grip top Rubber:	75 ShA

PP - Code 02
Polypropylene

Max w. load:	16500 N/m
Weight:	8,4 kg/m²
Temp. range:	dry 4÷80 °C wet 4÷65 °C
Pin material:	PP blu
Hardness of Grip top Rubber:	75 ShA

MX - Code 03
Performance PBT

Max w. load:	21500 N/m
Weight:	10,5 kg/m²
Temp. range:	dry -40÷120 °C wet -40÷60 °C
Pin material:	POM grey
Hardness of Grip top Rubber:	75 ShA

Version A - Standard

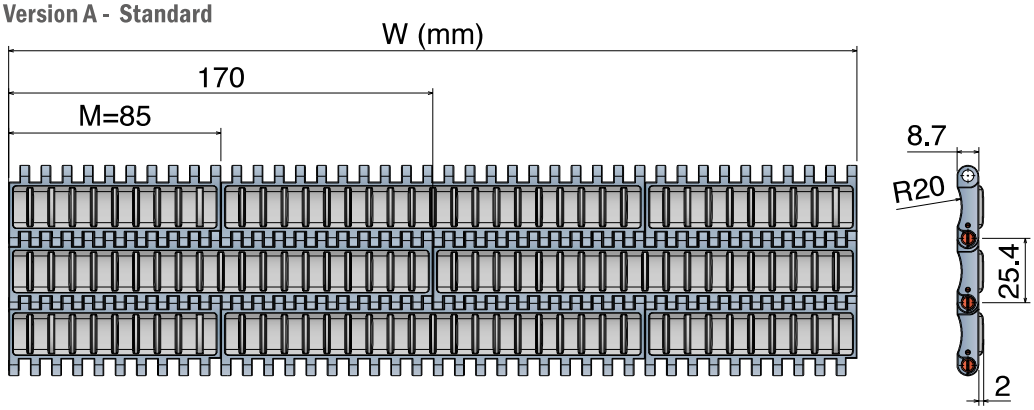

Version B - With 1 Positioner

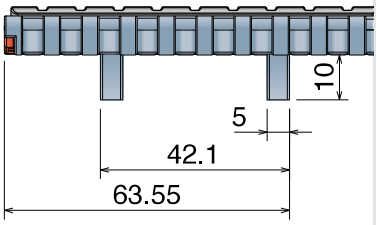

Version C - With 2 Positioner

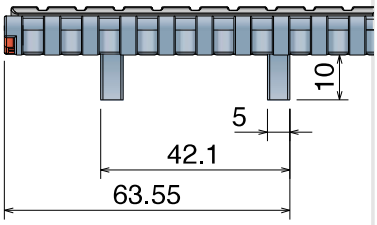

Version A - Standard

Series	Material	Width	Version
5223	*	0085	A
5223	*	0170	A
5223	*	0255	A
5223	*	0340	A
5223	*	0425	A
5223	*	0510	A
5223	*	0595	A
5223	*	0680	A
5223	*	0765	A
5223	*	0850	A
5223	*	0935	A
5223	*	1020	A
5223	*	1105	A
5223	*	1190	A
5223	*	1275	A
5223	*	1360	A
5223	*	1445	A
5223	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5223	*	0085	B
5223	*	0170	B
5223	*	0255	B
5223	*	0340	B
5223	*	0425	B
5223	*	0510	B
5223	*	0595	B
5223	*	0680	B
5223	*	0765	B
5223	*	0850	B
5223	*	0935	B
5223	*	1020	B
5223	*	1105	B
5223	*	1190	B
5223	*	1275	B
5223	*	1360	B
5223	*	1445	B
5223	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5223	*	0085	C
5223	*	0170	C
5223	*	0255	C
5223	*	0340	C
5223	*	0425	C
5223	*	0510	C
5223	*	0595	C
5223	*	0680	C
5223	*	0765	C
5223	*	0850	C
5223	*	0935	C
5223	*	1020	C
5223	*	1105	C
5223	*	1190	C
5223	*	1275	C
5223	*	1360	C
5223	*	1445	C
5223	*	1530	C

550 GT Side indent

Tappeto Modulare 550 GT, H=8,7 M=85

Modular Belt Series 550 GT, H=8,7 M=85 / Modulare Mattenkette 550 GT, H=8,7 M=85

Metric Size

CODE STRUCTURE GUIDE (Example)			
5225	02	0595	B
Series	*Material	Width	Version

pg. 224-225
pg. 420->428

Backflex radius min.: 30 mm

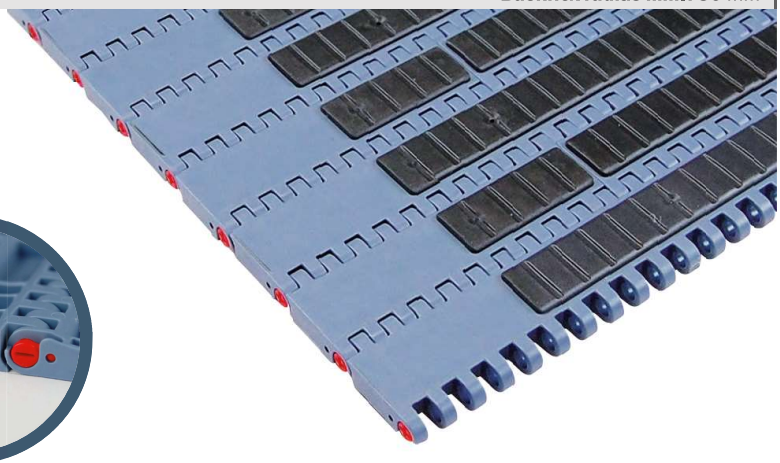

*Material

LFA - Code 01
Low friction Acetal

Max w. load:	27500 N/m
Weight:	9,8 kg/m²
Temp. range:	dry -40÷80 °C wet -40÷65 °C
Pin material:	PBT white
Hardness of Grip top Rubber:	75 ShA

PP - Code 02
Polypropylene

Max w. load:	16500 N/m
Weight:	8,2 kg/m²
Temp. range:	dry 4÷80 °C wet 4÷65 °C
Pin material:	PP blu
Hardness of Grip top Rubber:	75 ShA

MX - Code 03
Performance PBT

Max w. load:	21500 N/m
Weight:	10,3 kg/m²
Temp. range:	dry -40÷120 °C wet -40÷60 °C
Pin material:	POM grey
Hardness of Grip top Rubber:	75 ShA

Version A - Standard

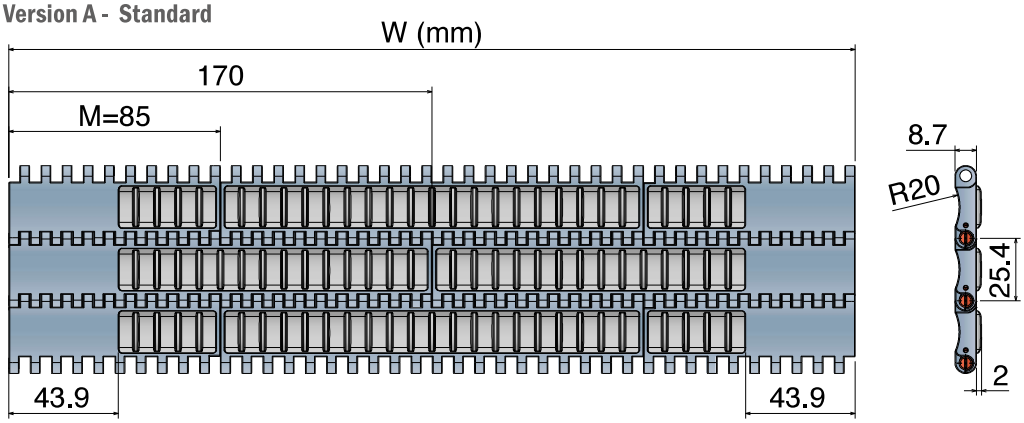

Version B - With 1 Positioner

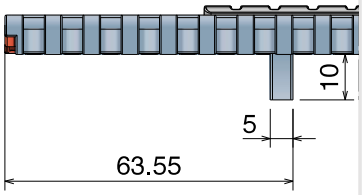

Version C - With 2 Positioner

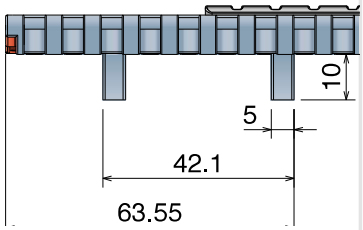

Version A - Standard

Series	Material	Width	Version
5225	*	0255	A
5225	*	0340	A
5225	*	0425	A
5225	*	0510	A
5225	*	0595	A
5225	*	0680	A
5225	*	0765	A
5225	*	0850	A
5225	*	0935	A
5225	*	1020	A
5225	*	1105	A
5225	*	1190	A
5225	*	1275	A
5225	*	1360	A
5225	*	1445	A
5225	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5225	*	0255	B
5225	*	0340	B
5225	*	0425	B
5225	*	0510	B
5225	*	0595	B
5225	*	0680	B
5225	*	0765	B
5225	*	0850	B
5225	*	0935	B
5225	*	1020	B
5225	*	1105	B
5225	*	1190	B
5225	*	1275	B
5225	*	1360	B
5225	*	1445	B
5225	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5225	*	0255	C
5225	*	0340	C
5225	*	0425	C
5225	*	0510	C
5225	*	0595	C
5225	*	0680	C
5225	*	0765	C
5225	*	0850	C
5225	*	0935	C
5225	*	1020	C
5225	*	1105	C
5225	*	1190	C
5225	*	1275	C
5225	*	1360	C
5225	*	1445	C
5225	*	1530	C

551

Metric Size

Pitch 25,4 mm
H= 12,7 mm

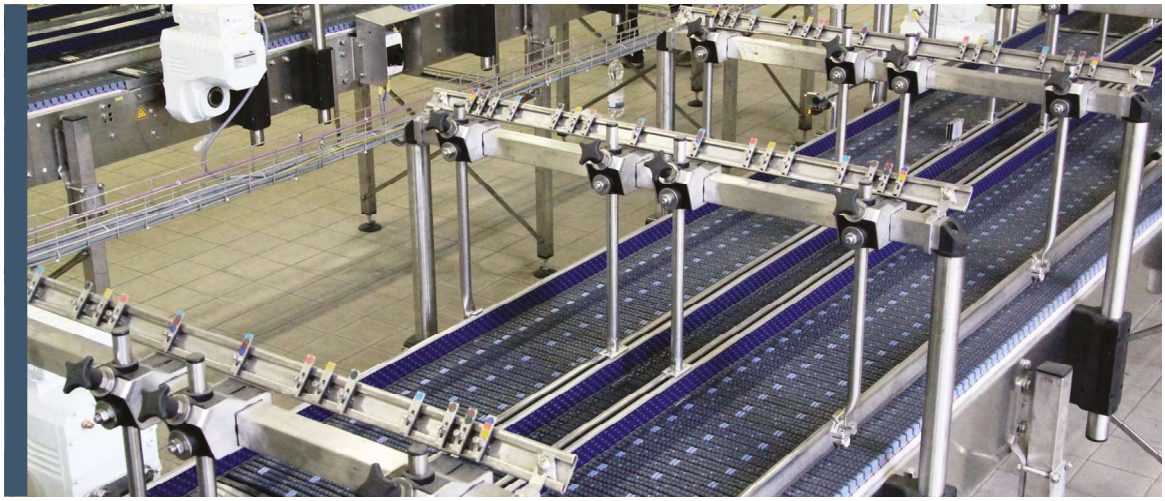

551 FT
551 FTT
551 GT
551 GT *Side indent*
551 LBP

551 FT

Tappeto Modulare 551 FT, H=12,7 M=85
Modular Belt Series 551 FT, H=12,7 M=85 / Modulare Mattenkette 551 FT, H=12,7 M=85

Metric Size

CODE STRUCTURE GUIDE (Example)			
5231	01	0680	C
Series	*Material	Width	Version

pg. 226-227
pg. 420->428

Backflex radius min.: 25 mm

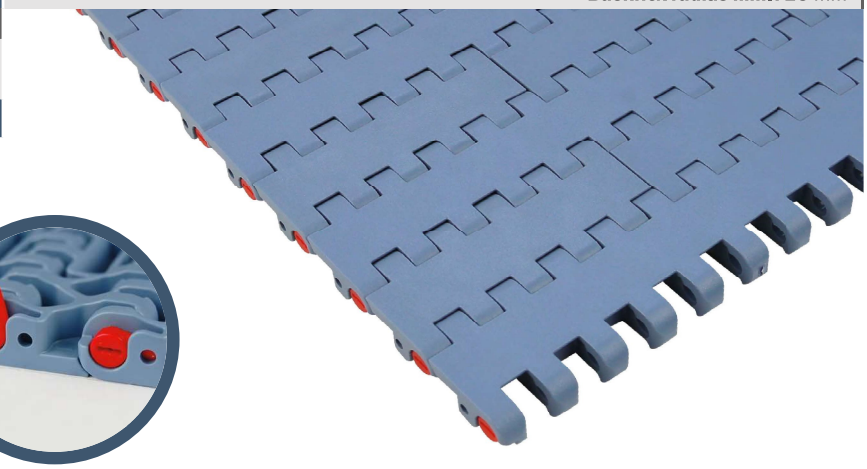

Version A - Standard

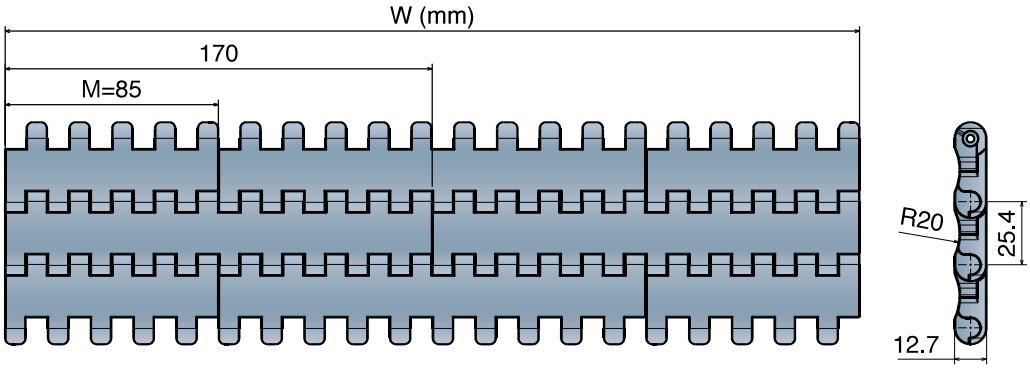

Version B - With 1 Positioner

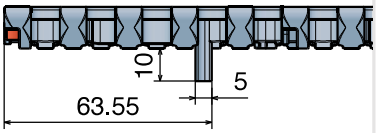

Version C - With 2 Positioner

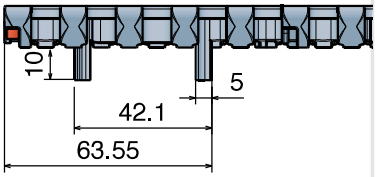

***Material**

LFA - Code 01
Low friction Acetal

Max w. load: 41500 N/m
Weight: 12,5 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MX - Code 03
Performance PBT

Max w. load: 33500 N/m
Weight: 12,0 kg/m²
Temp. range: dry -40÷120 °C, wet -40÷60 °C
Pin material: POM grey

MK - Code 08
Super Performance Acetal

Max w. load: 40000 N/m
Weight: 12,5 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MPX - Code 25
Lubricated Acetal

Max w. load: 41500 N/m
Weight: 12,5 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

DKM - Code 16
Aramide Reinforced Acetal

Max w. load: 41500 N/m
Weight: 12,5 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MWX - Code 17
Polyamide Composite

Max w. load: 41500 N/m
Weight: 13,0 kg/m²
Temp. range: dry -40÷104 °C, wet NR
Pin material: PBT white

Version A - Standard

Series	Material	Width	Version
5231	*	0085	A
5231	*	0170	A
5231	*	0255	A
5231	*	0340	A
5231	*	0425	A
5231	*	0510	A
5231	*	0595	A
5231	*	0680	A
5231	*	0765	A
5231	*	0850	A
5231	*	0935	A
5231	*	1020	A
5231	*	1105	A
5231	*	1190	A
5231	*	1275	A
5231	*	1360	A
5231	*	1445	A
5231	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5231	*	0085	B
5231	*	0170	B
5231	*	0255	B
5231	*	0340	B
5231	*	0425	B
5231	*	0510	B
5231	*	0595	B
5231	*	0680	B
5231	*	0765	B
5231	*	0850	B
5231	*	0935	B
5231	*	1020	B
5231	*	1105	B
5231	*	1190	B
5231	*	1275	B
5231	*	1360	B
5231	*	1445	B
5231	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5231	*	0085	C
5231	*	0170	C
5231	*	0255	C
5231	*	0340	C
5231	*	0425	C
5231	*	0510	C
5231	*	0595	C
5231	*	0680	C
5231	*	0765	C
5231	*	0850	C
5231	*	0935	C
5231	*	1020	C
5231	*	1105	C
5231	*	1190	C
5231	*	1275	C
5231	*	1360	C
5231	*	1445	C
5231	*	1530	C

551 FTT

Tappeto Modulare 551 FTT, H=12,7 M=85
Modular Belt Series 551 FTT, H=12,7 M=85 / Modulare Mattenkette 551 FTT, H=12,7 M=85

Metric Size

CODE STRUCTURE GUIDE (Example)			
5236	01	0255	C
Series	*Material	Width	Version

pg. 226-227
pg. 420->428

Backflex radius min.: 25 mm

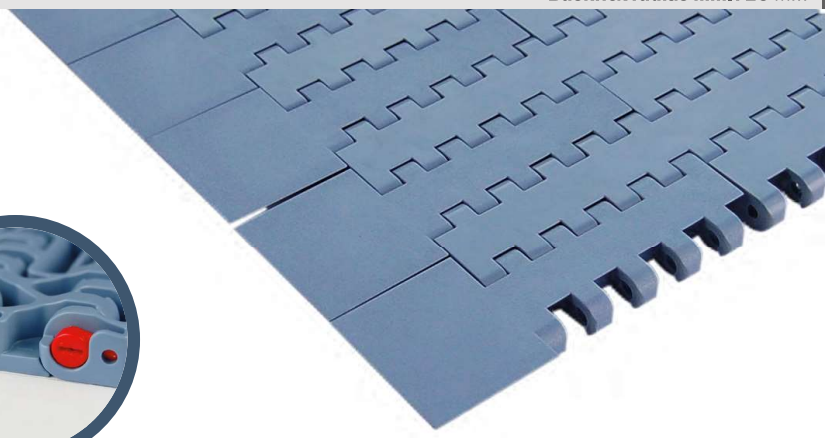

*Material

LFA - Code 01
Low friction Acetal

Max w. load: 41500 N/m
Weight: 12,5 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MX - Code 03
Performance PBT

Max w. load: 33500 N/m
Weight: 12,0 kg/m²
Temp. range: dry -40÷120 °C, wet -40÷60 °C
Pin material: POM grey

MK - Code 08
Super Performance Acetal

Max w. load: 40000 N/m
Weight: 12,5 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MPX - Code 25
Lubricated Acetal

Max w. load: 41500 N/m
Weight: 12,5 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

DKM - Code 16
Aramide Reinforced Acetal

Max w. load: 41500 N/m
Weight: 12,5 kg/m²
Temp. range: dry -40÷80 °C, wet -40÷65 °C
Pin material: PBT white

MWX - Code 17
Polyamide Composite

Max w. load: 41500 N/m
Weight: 13,0 kg/m²
Temp. range: dry -40÷104 °C, wet NR
Pin material: PBT white

Version C

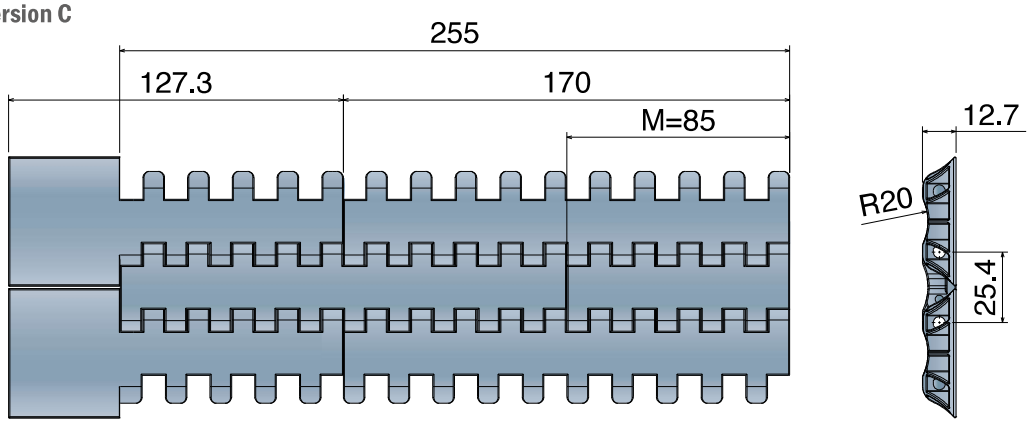

Version CN - Near

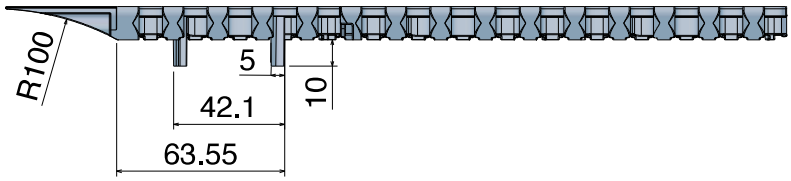

Version CO - Opposite

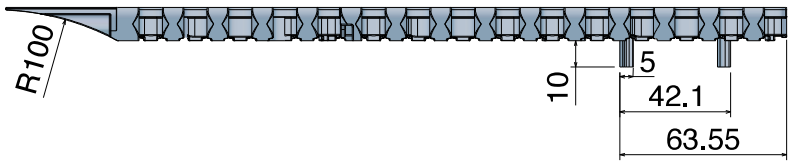

Version C

Series	Material	Width	Version
5236	*	0085	C

Version CN - Near

Series	Material	Width	Version
5236	*	0170	CN
5236	*	0255	CN

Version CO - Opposite

Series	Material	Width	Version
5236	*	0170	CO
5236	*	0255	CO

551 GT

Tappeto Modulare 551 GT, H=12,7 M=85
Modular Belt Series 551 GT, H=12,7 M=85 / Modulare Mattenkette 551 GT, H=12,7 M=85

Metric Size

CODE STRUCTURE GUIDE (Example)			
5233	01	0255	B
Series	*Material	Width	Version

pg. 226-227
pg. 420->428

Backflex radius min.: 30 mm

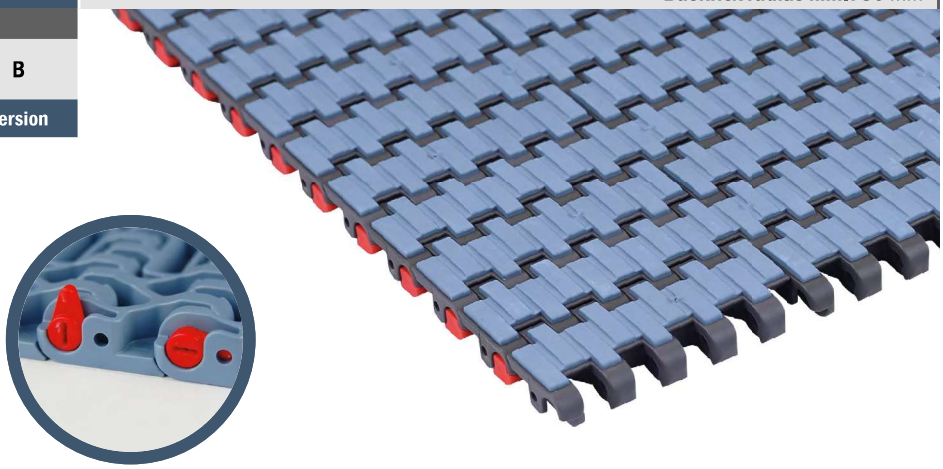

***Material**

LFA - Code 01
Low friction Acetal

Max w. load:	41500 N/m
Weight:	13,5 kg/m²
Temp. range:	dry -40÷80 °C wet -40÷65 °C
Pin material:	PBT white
Hardness of Grip top Rubber:	75 ShA

PP - Code 02
Polypropylene

Max w. load:	27000 N/m
Weight:	11,0 kg/m²
Temp. range:	dry 4÷80 °C wet 4÷65 °C
Pin material:	PP blu
Hardness of Grip top Rubber:	75 ShA

MX - Code 03
Performance PBT

Max w. load:	33500 N/m
Weight:	12,7 kg/m²
Temp. range:	dry -40÷120 °C wet -40÷60 °C
Pin material:	POM grey
Hardness of Grip top Rubber:	75 ShA

Version A - Standard

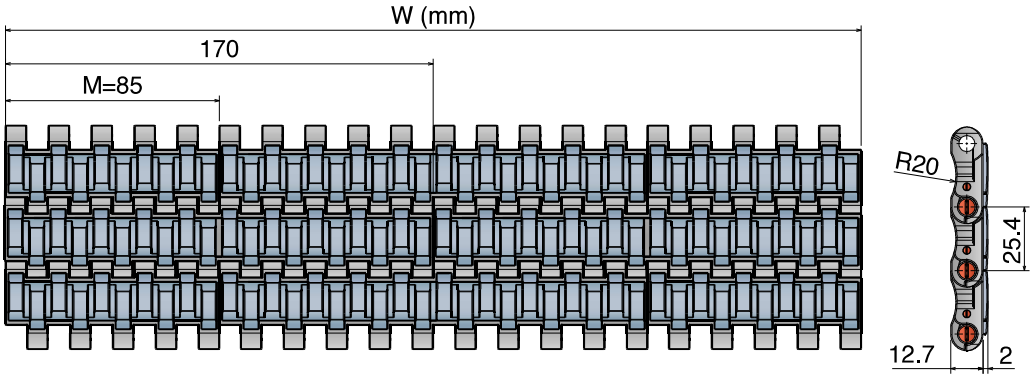

Version B - With 1 Positioner



Version C - With 2 Positioner



Version A - Standard

Series	Material	Width	Version
5233	*	0085	A
5233	*	0170	A
5233	*	0255	A
5233	*	0340	A
5233	*	0425	A
5233	*	0510	A
5233	*	0595	A
5233	*	0680	A
5233	*	0765	A
5233	*	0850	A
5233	*	0935	A
5233	*	1020	A
5233	*	1105	A
5233	*	1190	A
5233	*	1275	A
5233	*	1360	A
5233	*	1445	A
5233	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5233	*	0085	B
5233	*	0170	B
5233	*	0255	B
5233	*	0340	B
5233	*	0425	B
5233	*	0510	B
5233	*	0595	B
5233	*	0680	B
5233	*	0765	B
5233	*	0850	B
5233	*	0935	B
5233	*	1020	B
5233	*	1105	B
5233	*	1190	B
5233	*	1275	B
5233	*	1360	B
5233	*	1445	B
5233	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5233	*	0085	C
5233	*	0170	C
5233	*	0255	C
5233	*	0340	C
5233	*	0425	C
5233	*	0510	C
5233	*	0595	C
5233	*	0680	C
5233	*	0765	C
5233	*	0850	C
5233	*	0935	C
5233	*	1020	C
5233	*	1105	C
5233	*	1190	C
5233	*	1275	C
5233	*	1360	C
5233	*	1445	C
5233	*	1530	C

551 GT *Side indent*

Tappeto Modulare 551 GT, H=12,7 M=85
Modular Belt Series 551 GT, H=12,7 M=85 / Modulare Mattenkette 551 GT, H=12,7 M=85

Metric Size

CODE STRUCTURE GUIDE (Example)			
5235	02	0765	A
Series	*Material	Width	Version

pg. 226-227
pg. 420->428

Backflex radius min.: 30 mm

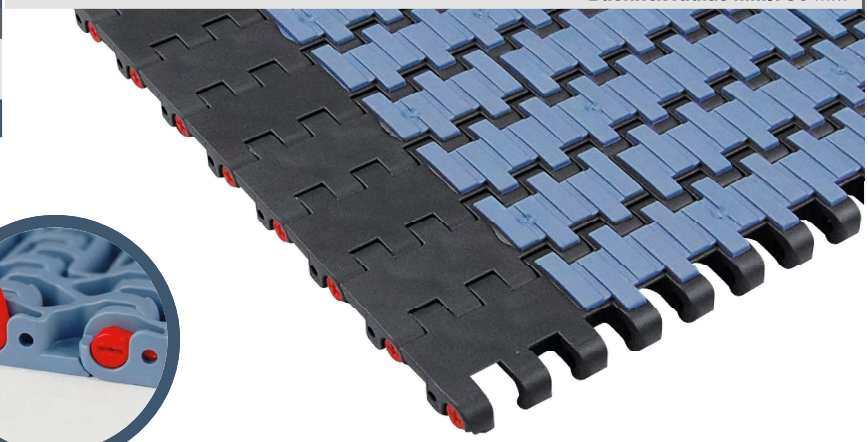



***Material**

LFA - Code 01
Low friction Acetal

Max w. load:	41500 N/m
Weight:	13,2 kg/m²
Temp. range:	dry -40÷80 °C wet -40÷65 °C
Pin material:	PBT white
Hardness of Grip top Rubber:	75 ShA

PP - Code 02
Polypropylene

Max w. load:	27000 N/m
Weight:	10,8 kg/m²
Temp. range:	dry 4÷80 °C wet 4÷65 °C
Pin material:	PP blu
Hardness of Grip top Rubber:	75 ShA

MX - Code 03
Performance PBT

Max w. load:	33500 N/m
Weight:	12,5 kg/m²
Temp. range:	dry -40÷120 °C wet -40÷60 °C
Pin material:	POM grey
Hardness of Grip top Rubber:	75 ShA

Version A - Standard

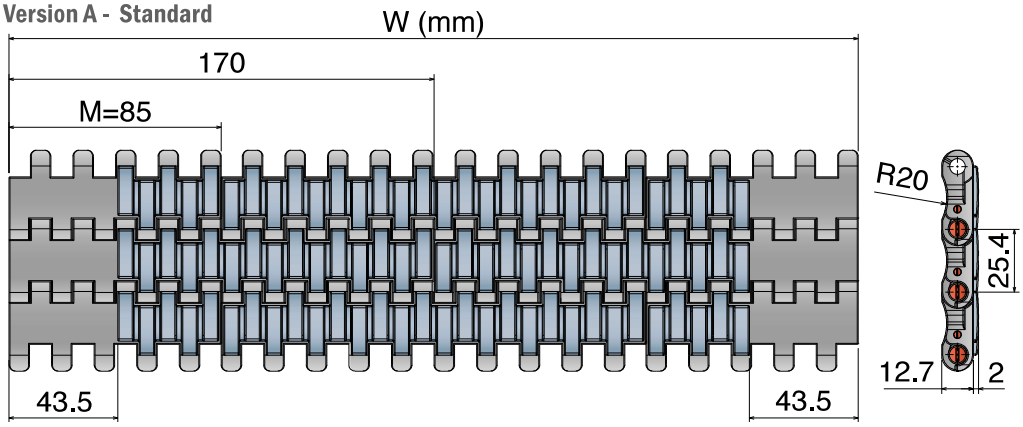

Version B - With 1 Positioner



Version C - With 2 Positioner



Version A - Standard

Series	Material	Width	Version
5235	*	0255	A
5235	*	0340	A
5235	*	0425	A
5235	*	0510	A
5235	*	0595	A
5235	*	0680	A
5235	*	0765	A
5235	*	0850	A
5235	*	0935	A
5235	*	1020	A
5235	*	1105	A
5235	*	1190	A
5235	*	1275	A
5235	*	1360	A
5235	*	1445	A
5235	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5235	*	0255	B
5235	*	0340	B
5235	*	0425	B
5235	*	0510	B
5235	*	0595	B
5235	*	0680	B
5235	*	0765	B
5235	*	0850	B
5235	*	0935	B
5235	*	1020	B
5235	*	1105	B
5235	*	1190	B
5235	*	1275	B
5235	*	1360	B
5235	*	1445	B
5235	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5235	*	0255	C
5235	*	0340	C
5235	*	0425	C
5235	*	0510	C
5235	*	0595	C
5235	*	0680	C
5235	*	0765	C
5235	*	0850	C
5235	*	0935	C
5235	*	1020	C
5235	*	1105	C
5235	*	1190	C
5235	*	1275	C
5235	*	1360	C
5235	*	1445	C
5235	*	1530	C

551 LBP

Tappeto Modulare 551 LBP, H=12,7 M=85
Modular Belt Series 551 LBP, H=12,7 M=85 / Modulare Mattenkette 551 LBP, H=12,7 M=85

Metric Size

CODE STRUCTURE GUIDE (Example)			
5234	01	0425	A
Series	*Material	Width	Version

pg. 226-227
pg. 420->428

Backflex radius min.: 120 mm

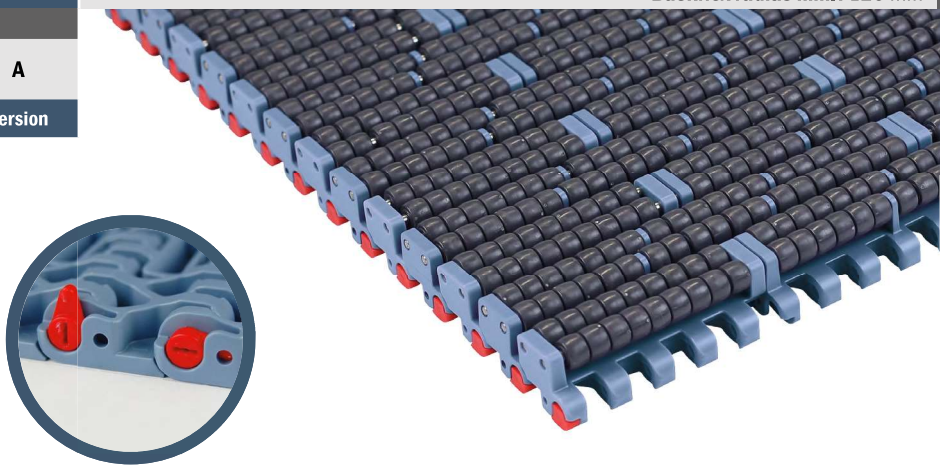

***Material**

LFA - Code 01
Low friction Acetal

Max w. load:	41500 N/m
Weight:	26,9 kg/m²
Temp. range:	dry -40÷80 °C
	wet 1÷65 °C
Pin material:	PBT white

Version A - Standard

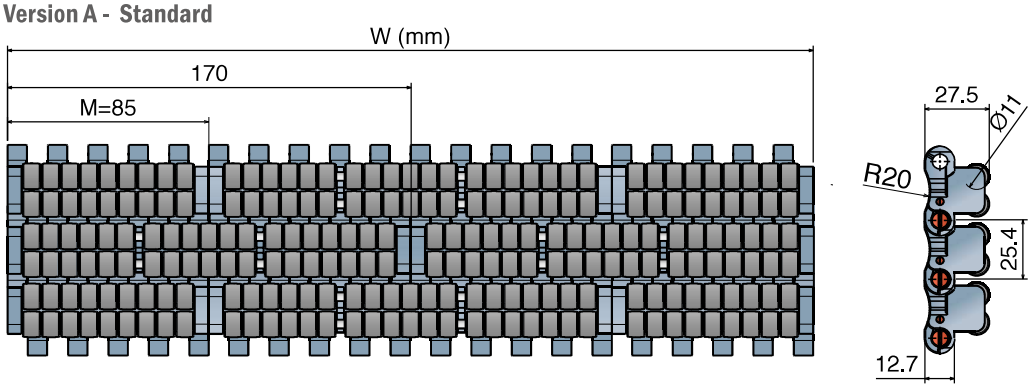

Version B - With 1 Positioner



Version C - With 2 Positioner



Version A - Standard

Series	Material	Width	Version
5234	*	0085	A
5234	*	0170	A
5234	*	0255	A
5234	*	0340	A
5234	*	0425	A
5234	*	0510	A
5234	*	0595	A
5234	*	0680	A
5234	*	0765	A
5234	*	0850	A
5234	*	0935	A
5234	*	1020	A
5234	*	1105	A
5234	*	1190	A
5234	*	1275	A
5234	*	1360	A
5234	*	1445	A
5234	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5234	*	0085	B
5234	*	0170	B
5234	*	0255	B
5234	*	0340	B
5234	*	0425	B
5234	*	0510	B
5234	*	0595	B
5234	*	0680	B
5234	*	0765	B
5234	*	0850	B
5234	*	0935	B
5234	*	1020	B
5234	*	1105	B
5234	*	1190	B
5234	*	1275	B
5234	*	1360	B
5234	*	1445	B
5234	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5234	*	0085	C
5234	*	0170	C
5234	*	0255	C
5234	*	0340	C
5234	*	0425	C
5234	*	0510	C
5234	*	0595	C
5234	*	0680	C
5234	*	0765	C
5234	*	0850	C
5234	*	0935	C
5234	*	1020	C
5234	*	1105	C
5234	*	1190	C
5234	*	1275	C
5234	*	1360	C
5234	*	1445	C
5234	*	1530	C

552

Imperial Size

Pitch 25,4 mm
H= 12,7 mm

552 FT
552 FT *One track Belt*
552 FTT

552 FT

Tappeto Modulare 552 FT, H=12,7 M=3"
Modular Belt Series 552 FT, H=12,7 M=3" / Modulare Mattenkette 552 FT, H=12,7 M=3"

Imperial Size

CODE STRUCTURE GUIDE (Example)			
5341	01	0021	A
Series	*Material	Width	Version

pg. 228-229
pg. 420->428

Backflex radius min.: 25 mm



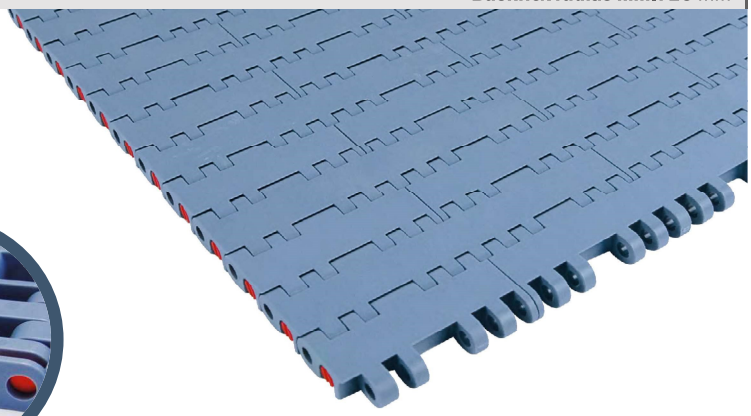

Version A - Standard

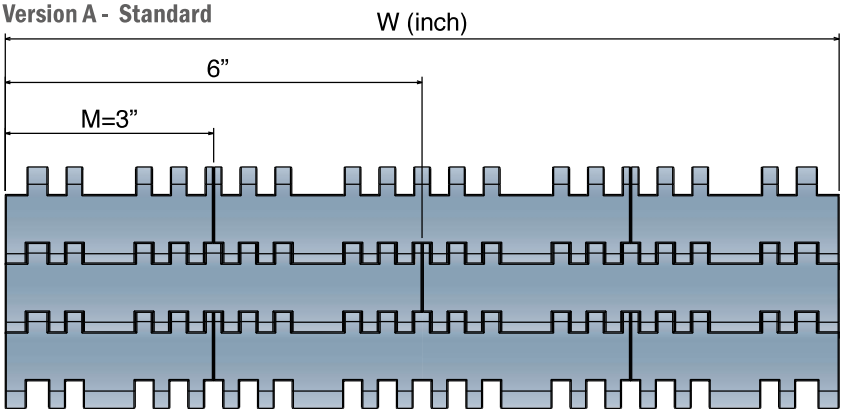



***Material**

LFA - Code 01
Low friction Acetal

Max w. load: 41500 N/m
Weight: 13,5 kg/m²
Temp. range: dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white

MX - Code 03
Performance PBT

Max w. load: 33500 N/m
Weight: 13,0 kg/m²
Temp. range: dry -40÷120 °C
wet -40÷60 °C
Pin material: POM grey

MK - Code 08
Super Performance Acetal

Max w. load: 40000 N/m
Weight: 13,5 kg/m²
Temp. range: dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white

MPX - Code 25
Lubricated Acetal

Max w. load: 41500 N/m
Weight: 13,5 kg/m²
Temp. range: dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white

DKM - Code 16
Aramide Reinforced Acetal

Max w. load: 41500 N/m
Weight: 13,5 kg/m²
Temp. range: dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white

MWX - Code 17
Polyamide Composite

Max w. load: 41500 N/m
Weight: 14,0 kg/m²
Temp. range: dry -40÷104 °C
wet NR
Pin material: PBT white

Version A - Standard

Series	Material	Width	Version
5341	*	0009	A
5341	*	0012	A
5341	*	0015	A
5341	*	0018	A
5341	*	0021	A
5341	*	0024	A
5341	*	0027	A
5341	*	0030	A
5341	*	0033	A
5341	*	0036	A
5341	*	0039	A
5341	*	0042	A
5341	*	0045	A
5341	*	0048	A
5341	*	0051	A
5341	*	0054	A

552 FT *One track Belt*

Tappeto Modulare 552 FT, H=12,7

Modular Belt Series 550 FT, H=12,7 / Modulare Mattenkette 552 FT, H=12,7

Imperial Size

CODE STRUCTURE GUIDE (Example)			
5341	01	0003	A
Series	*Material	Width	Version

pg. 228-229
pg. 420->428

Backflex radius min.: 25 mm

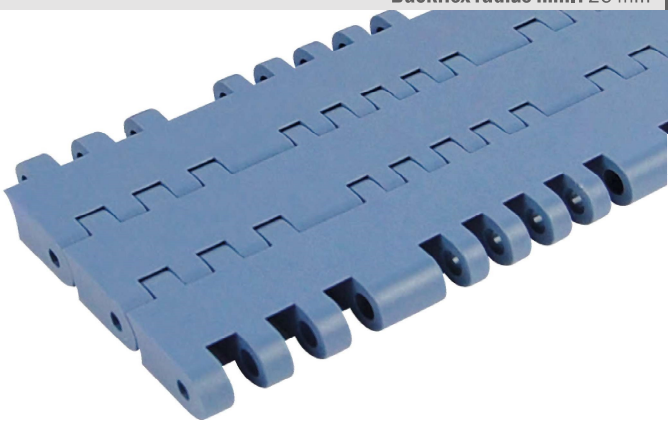

*Material

LFA - Code 01
Low friction Acetal

Max w. load:	41500 N/m
Weight:	13,5 kg/m²
Temp. range:	dry -40÷80 °C
	wet -40÷65 °C
Pin material:	PBT white

MX - Code 03
Performance PBT

Max w. load:	33500 N/m
Weight:	13,0 kg/m²
Temp. range:	dry -40÷120 °C
	wet -40÷60 °C
Pin material:	POM grey

MK - Code 08
Super Performance Acetal

Max w. load:	40000 N/m
Weight:	13,5 kg/m²
Temp. range:	dry -40÷80 °C
	wet -40÷65 °C
Pin material:	PBT white

MPX - Code 25
Lubricated Acetal

Max w. load:	41500 N/m
Weight:	13,5 kg/m²
Temp. range:	dry -40÷80 °C
	wet -40÷65 °C
Pin material:	PBT white

DKM - Code 16
Aramide Reinforced Acetal

Max w. load:	41500 N/m
Weight:	13,5 kg/m²
Temp. range:	dry -40÷80 °C
	wet -40÷65 °C
Pin material:	PBT white

MWX - Code 17
Polyamide Composite

Max w. load:	41500 N/m
Weight:	134,0 kg/m²
Temp. range:	dry -40÷104 °C
	wet NR
Pin material:	PBT white

Version A - Standard

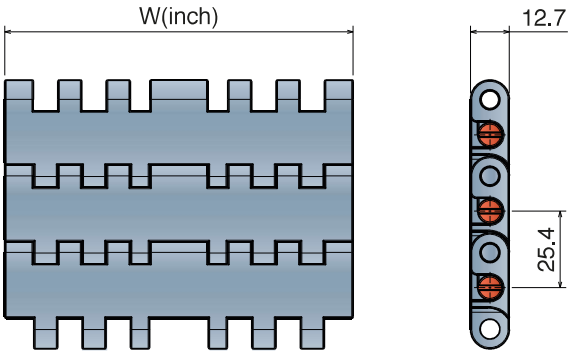

Version C - With 2 Positioner

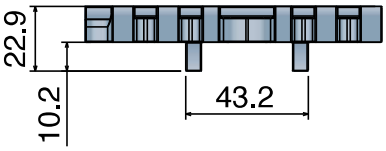

Version A/C
One track belt

Series	Material	Width	Version
5341	*	0003	A
5341	*	0006	A
5341	*	0003	C
5341	*	0006	C



K325 - One track belt

Series	Material	Width	Version
5341	*	9325	A
5341	*	9325	C



K450 - One track belt

Series	Material	Width	Version
5341	*	9450	A
5341	*	9450	C

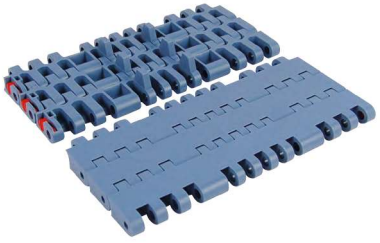

K750 - One track belt

Series	Material	Width	Version
5341	*	9750	A
5341	*	9750	C

552 FTT

Tappeto Modulare 552 FTT, H=12,7
Modular Belt Series 552 FTT, H=12,7 / Modulare Mattenkette 552 FTT, H=12,7

Imperial Size

CODE STRUCTURE GUIDE (Example)			
5346	01	9450	C-R
Series	*Material	Width	Version

pg. 228-229
pg. 420->428

Backflex radius min.: 25 mm

552 FTT - DX Version

K450 / K750

Series	Material	Width	Version
5346	*	9450	C - R
5346	*	9750	C - R

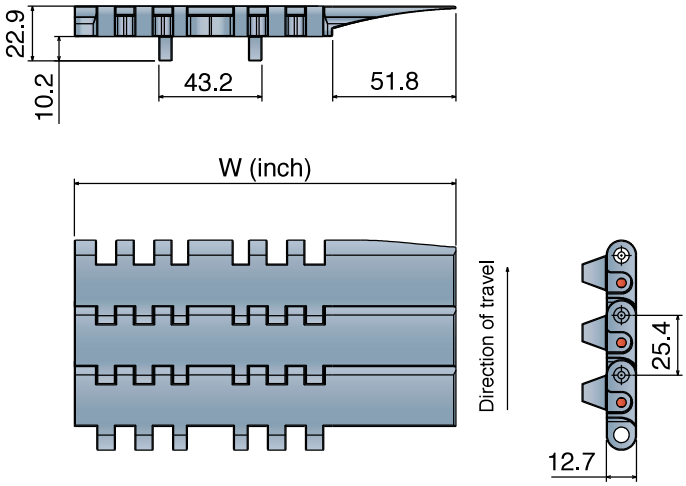

552 FTT - SX Version

K450 / K750

Series	Material	Width	Version
5346	*	9450	C - L
5346	*	9750	C - L

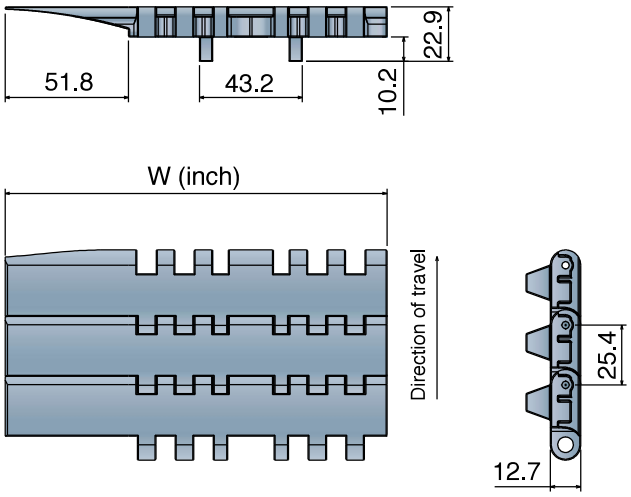

***Material**

LFA - Code 01
Low friction Acetal

Max w. load:	41500 N/m
Weight:	13,5 kg/m²
Temp. range:	dry -40÷80 °C
	wet -40÷65 °C
Pin material:	PBT white

MX - Code 03
Performance PBT

Max w. load:	33500 N/m
Weight:	13,0 kg/m²
Temp. range:	dry -40÷120 °C
	wet -40÷60 °C
Pin material:	POM grey

MK - Code 08
Super Performance Acetal

Max w. load:	40000 N/m
Weight:	13,5 kg/m²
Temp. range:	dry -40÷80 °C
	wet -40÷65 °C
Pin material:	PBT white

MPX - Code 25
Lubricated Acetal

Max w. load:	41500 N/m
Weight:	13,5 kg/m²
Temp. range:	dry -40÷80 °C
	wet -40÷65 °C
Pin material:	PBT white

DKM - Code 16
Aramide Reinforced Acetal

Max w. load:	41500 N/m
Weight:	13,5 kg/m²
Temp. range:	dry -40÷80 °C
	wet -40÷65 °C
Pin material:	PBT white

MWX - Code 17
Polyamide Composite

Max w. load:	41500 N/m
Weight:	14,0 kg/m²
Temp. range:	dry -40÷104 °C
	wet NR
Pin material:	PBT white

556

Imperial Size

Pitch 25,4 mm
H= 12,7 mm

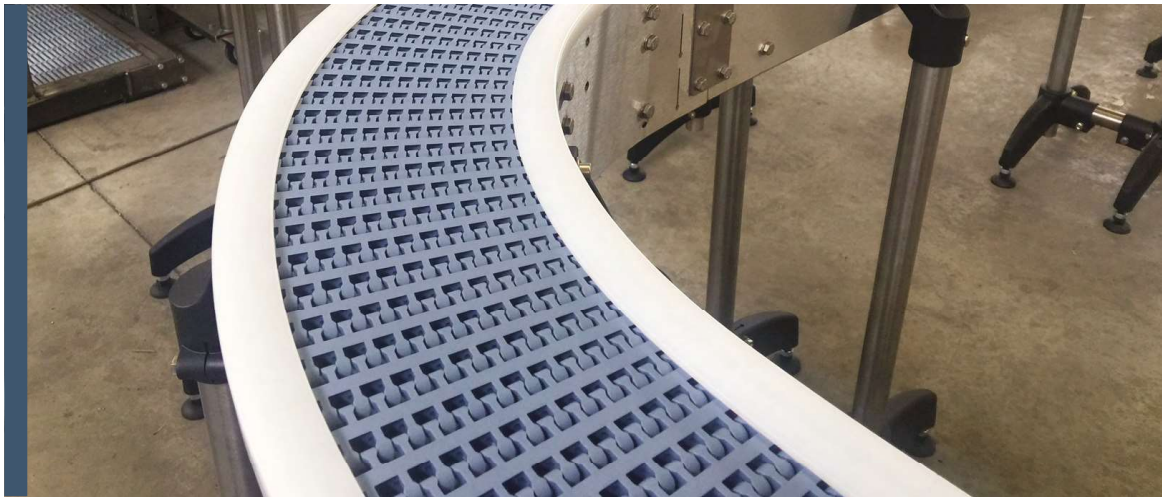

556 FT
556 GT

556 FT

Tappeto Modulare Curvilineo Serie 556, H=12,7 M=3"
Side Flex Modular Belt Series 556, H=12,7 M=3" / Kurvengängige Mattenkette Serie 556, H=12,7 M=3"

Imperial Size

CODE STRUCTURE GUIDE (Example)			
5431	01	0048	C
Series	*Material	Width	Version

Backflex radius min.: 25 mm

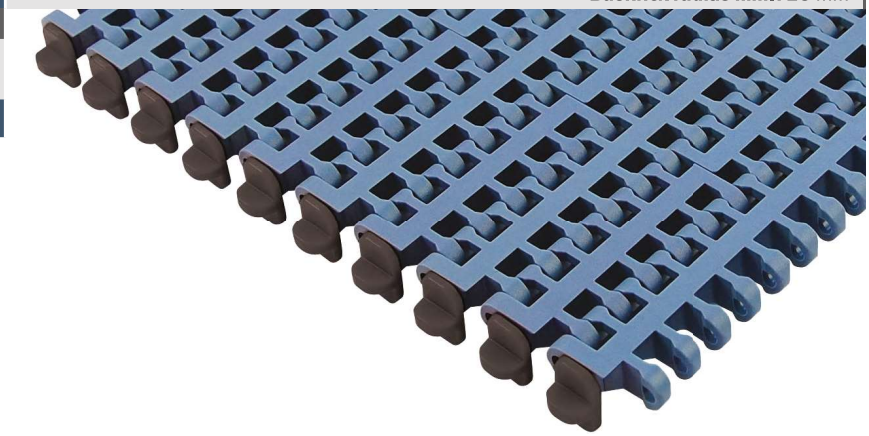

pg. 232-233
pg. 420->428

***Material**

LFA - Code 01
Low friction Acetal

Max w. load:
Straight: 30000 N/m
Curve 2000 N
Weight: 7,5 kg/m²
Temp. range: dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white

MX - Code 03
Performance PBT

Max w. load:
Straight: 24000 N/m
Curve 1500 N
Weight: 7,2 kg/m²
Temp. range: dry -40÷120 °C
wet -40÷60 °C
Pin material: POM grey

MK - Code 08
Super Performance Acetal

Max w. load:
Straight: 28800 N/m
Curve 1900 N
Weight: 7,7 kg/m²
Temp. range: dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white

MPX - Code 25
Lubricated Acetal

Max w. load:
Straight: 30000 N/m
Curve 2000 N
Weight: 7,5 kg/m²
Temp. range: dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white

DKM - Code 16
Aramide Reinforced Acetal

Max w. load:
Straight: 30000 N/m
Curve 2000 N
Weight: 7,5 kg/m²
Temp. range: dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white

MWX - Code 17
Polyamide Composite

Max w. load:
Straight: 30000 N/m
Curve 2000 N
Weight: 7,5 kg/m²
Temp. range: dry -40÷104 °C
wet NR
Pin material: PBT white

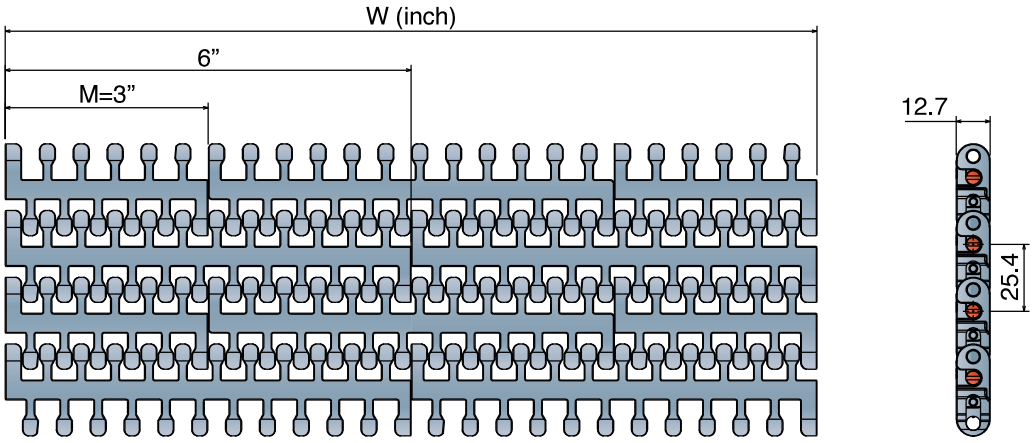

STANDARD



Series	Material	Width	Version	min radius
5431	*	0009	A	435
5431	*	0012	A	580
5431	*	0015	A	725
5431	*	0018	A	890
5431	*	0021	A	1040
5431	*	0024	A	1250

ONE TRACK BELT

Series	Material	Width	Version	min radius
5431	*	0003	A	145
5431	*	0006	A	290

TAB



Series	Material	Width	Version	min radius
5431	*	0006	B	290
5431	*	0009	B	435
5431	*	0012	B	580
5431	*	0015	B	725
5431	*	0018	B	890
5431	*	0021	B	1040
5431	*	0024	B	1250

TAB/POSITIONER



Series	Material	Width	Version	min radius
5431	*	0006	C	290
5431	*	0009	C	435
5431	*	0012	C	580
5431	*	0015	C	725
5431	*	0018	C	890
5431	*	0021	C	1040
5431	*	0024	C	1250

556 GT

Tappeto Modulare Curvilineo Serie 556 GT, H=12,7 M=3"
Side Flex Modular Belt Series 556 GT, H=12,7 M=3" / Kurvengängige Mattenkette Serie 556 GT, H=12,7 M=3"

Imperial Size

CODE STRUCTURE GUIDE (Example)			
5433	02	0018	B
Series	*Material	Width	Version

pg. 232-233
pg. 420->428

Backflex radius min.: 25 mm

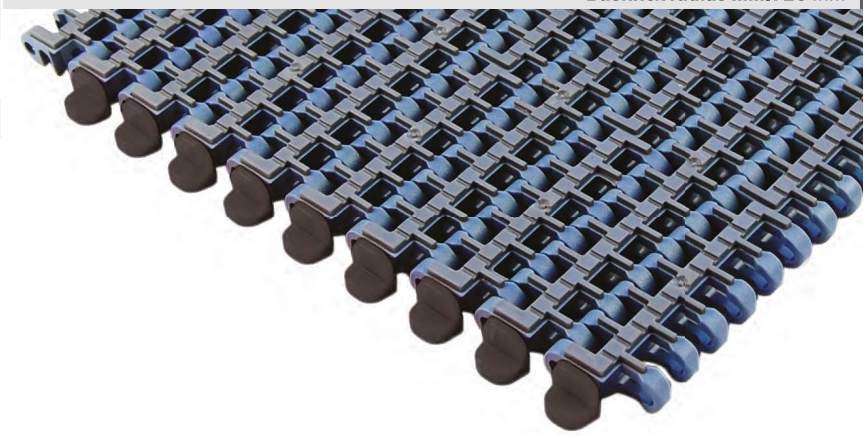

***Material**

LFA - Code 01
Low friction Acetal

Max w. load:
Straight: 30000 N/m
Curve 2000 N
Weight: 7,7 kg/m²
Temp. range: dry -40÷80 °C
wet -40÷65 °C
Pin material: PBT white
Hardness of Grip top Rubber: 75 ShA

PPB - Code 24
Polypropylene
Standard rubber: 50 ShA
Code: -S

Max w. load:
Straight: 19500 N/m
Curve 1300 N
Weight: 6,0 kg/m²
Temp. range: dry 4÷65 °C
wet 4÷65 °C
Pin material: PP blu
Hardness of Grip top Rubber: 50 ShA

MX - Code 03
Performance PBT

Max w. load:
Straight: 28800 N/m
Curve 1500 N
Weight: 7,8 kg/m²
Temp. range: dry -40÷120 °C
wet -40÷60 °C
Pin material: POM grey
Hardness of Grip top Rubber: 75 ShA

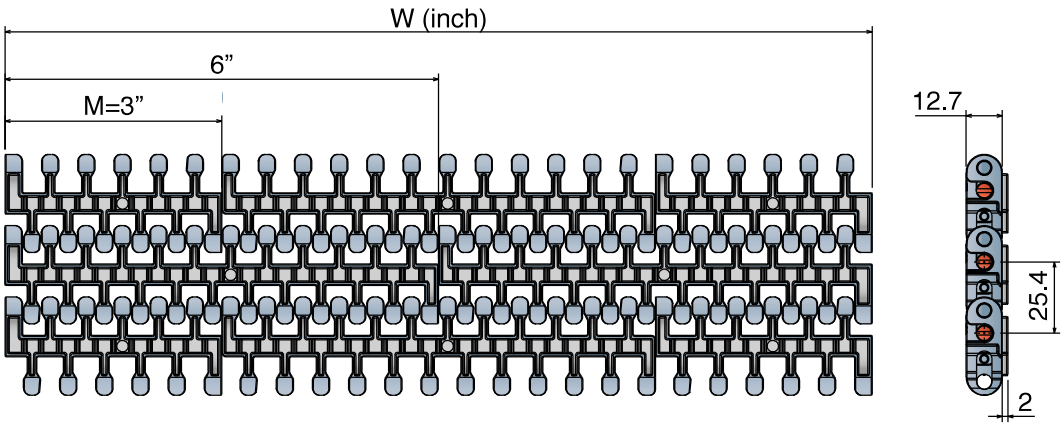

STANDARD



Series	Material	Width	Version	min radius
5433	*	0009	A	435
5433	*	0012	A	580
5433	*	0015	A	725
5433	*	0018	A	890
5433	*	0021	A	1040
5433	*	0024	A	1250

ONE TRACK BELT

Series	Material	Width	Version	min radius
5433	*	0003	A	145
5433	*	0006	A	290

TAB



Series	Material	Width	Version	min radius
5433	*	0006	B	290
5433	*	0009	B	435
5433	*	0012	B	580
5433	*	0015	B	725
5433	*	0018	B	890
5433	*	0021	B	1040
5433	*	0024	B	1250

TAB/POSITIONER



Series	Material	Width	Version	min radius
5433	*	0006	C	290
5433	*	0009	C	435
5433	*	0012	C	580
5433	*	0015	C	725
5433	*	0018	C	890
5433	*	0021	C	1040
5433	*	0024	C	1250