

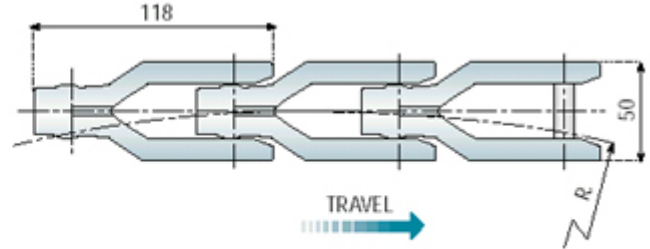
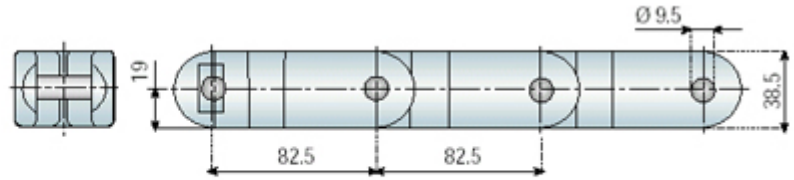


CC 1400 - CC 1400 TAB CRATE CONVEYOR CHAINS

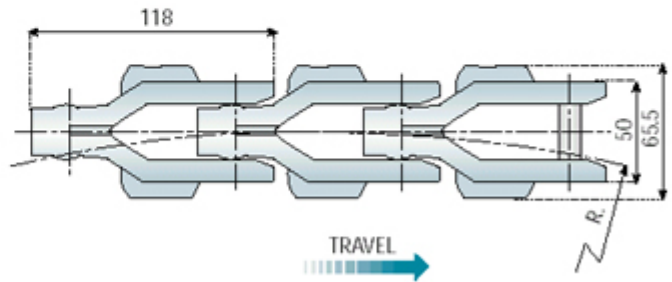

CC 1400

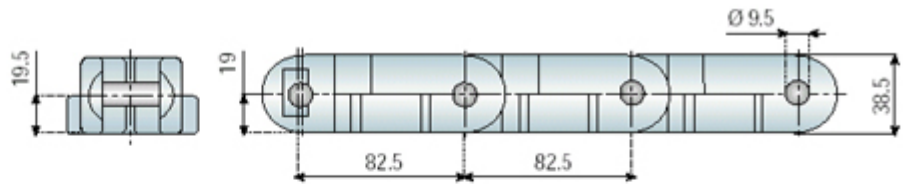

CC 1400 TAB

CHAIN - REF.	CODE	Material		R min.	Breaking Load N	Weight Kg/m
		Link	Pin			
CC 1400	11008	W	SS	660	18000	3.24
CC 1400 TAB	11010					3.44
NG 1400	11047	NG	16000		3.24	
NG 1400 TAB	11048				3.44	
CC 1400 R	11008R	W	SS Riveted	660	18000	3.24
CC 1400 TAB-R	11010R					3.44

NG 1400 R	11047R	NG			16000	3.24
NG 1400 TAB-R	11048R					3.44

W - Acetal Resin (white) ([For further information](#))

NG - New Generation (green) ([For further information](#))

SS - Stainless Steel

Standard length:

37 pitches (10 Ft - 3.05 m)

Application:

- Transportation of plastic crates
- General purpose conveying applications

Advantages:

- High strength
- Curving radius capability
- Matt uniform finish
- Very high wear resistance
- Fully bidirectional



Chains Material



Sprockets



Chemical Resistance



Engineering Information




Print




Attention

CC 600 F - CC 631 TAB CRATE CONVEYOR CHAINS

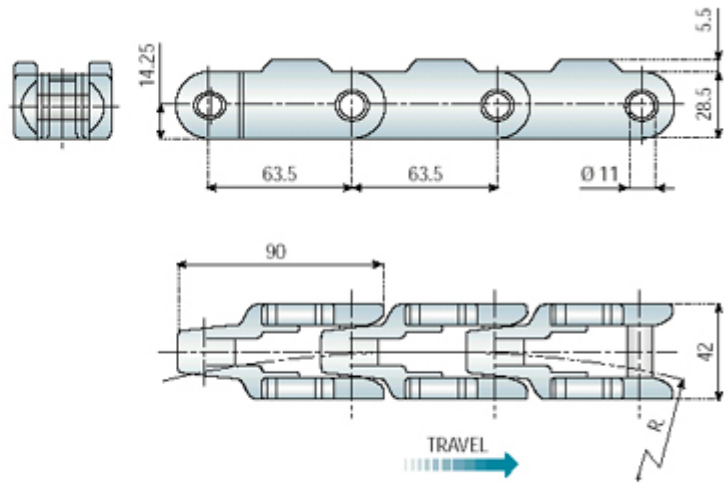

CC 600 F

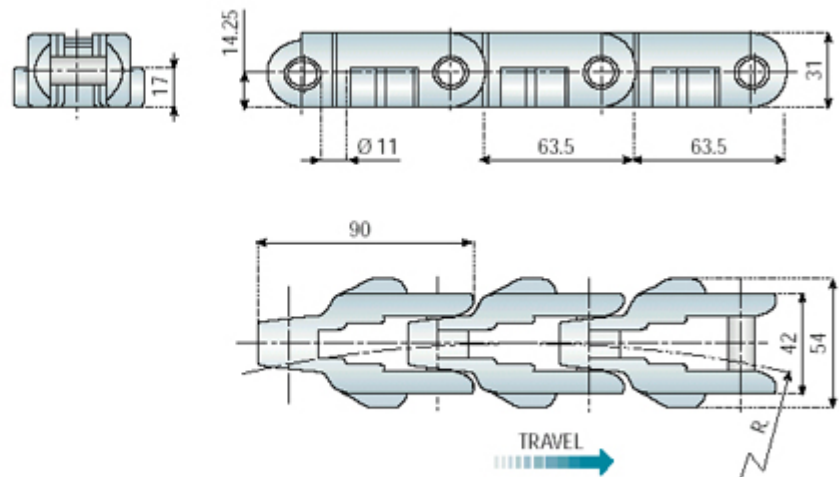

CC 631 TAB

CHAIN - REF.	CODE	Material		R min.	Breaking Load N	Weight Kg/m
		Plate	Pin			
CC 600 F	11036	W	SS	700	14000	1.41
CC 631 TAB	11037					

W - Acetal Resin (white) [\(For further information\)](#)

AS - Antistatic on request [\(For further information\)](#)

SS - Stainless Steel

Standard length:

48 pitches (10 Ft - 3.05 m)

Application:

- Transportation of plastic crates
- General purpose conveying applications

Advantages:

- High strength
- Curving radius capability
- Matt uniform finish
- Very high wear resistance



Chains Material



Sprockets



Chemical Resistance



Engineering Information



Print




Attention




CC 600 P - CC 600 TAB P

CRATE CONVEYOR CHAINS WITH TOP PLATE

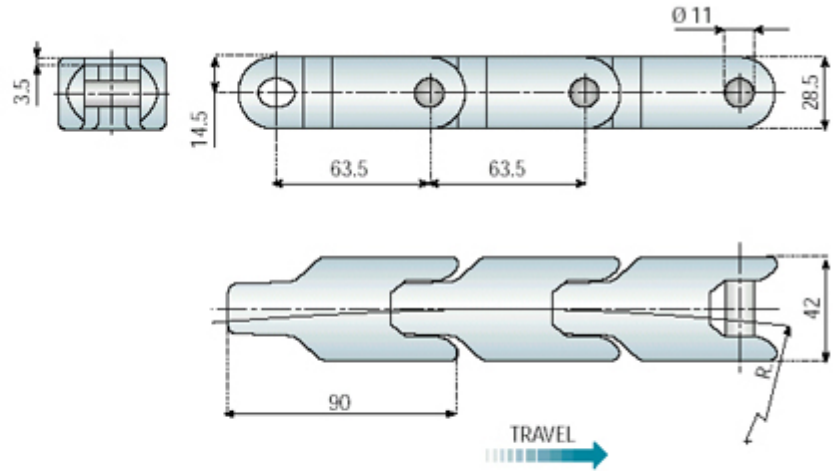

CC 600 P

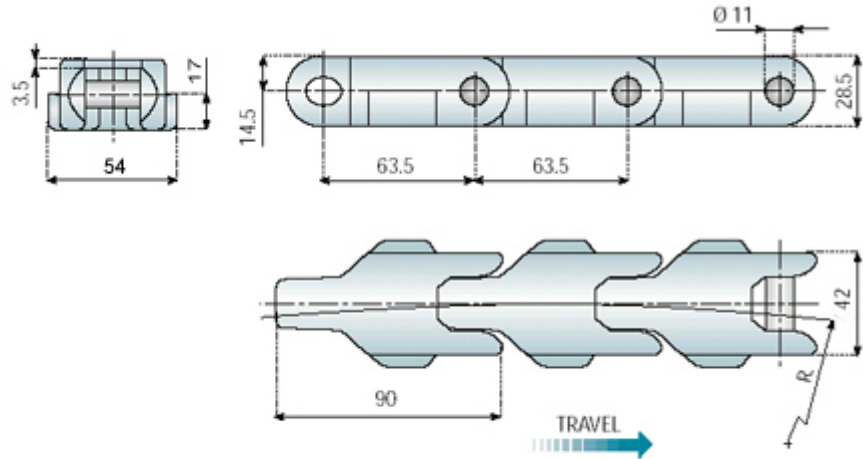

CC 600 TAB P

CHAIN - REF.	CODE	Material		R min.	Breaking Load N	Weight Kg/m
		Link	Pin			
CC 600 P	11045	W	SS	700	14000	1.40
CC 600 TAB P	11046					1.55

W - Acetal Resin (white) ([For further information](#))

SS - Stainless Steel

Standard length:
48 pitches (10 Ft - 3.05 m)

- Application:**
- Transportation of plastic crates
 - General purpose conveying applications

Advantages:

- High strength
- Curving radius capability
- Matt uniform finish
- Very high wear resistance



Chains Material



Sprockets



Chemical Resistance



Engineering Information





Print



Attention



CC 600 - CC 600 TAB CRATE CONVEYOR CHAINS

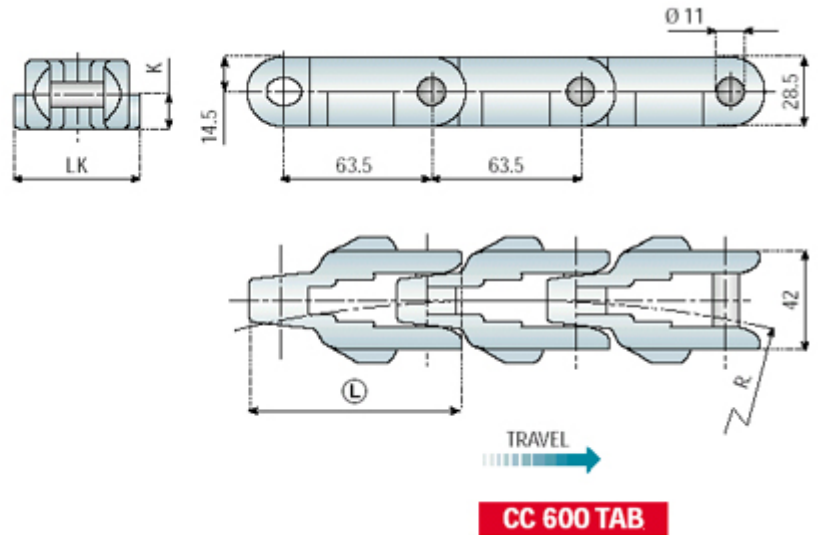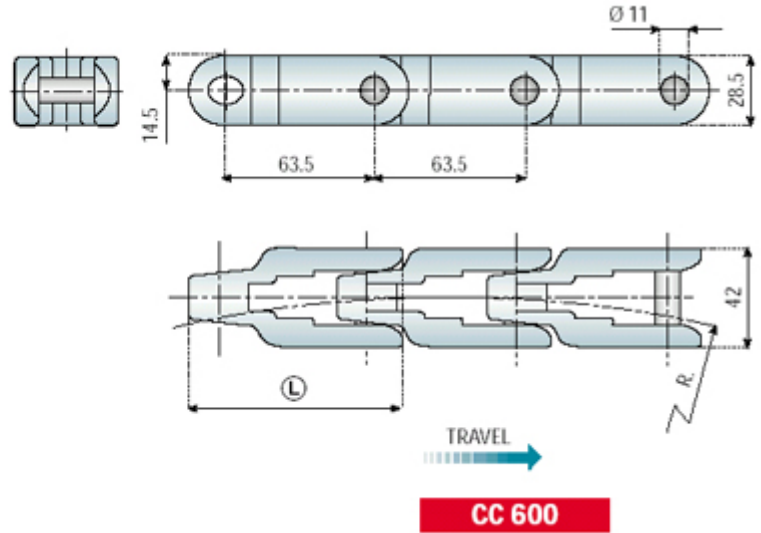

CHAIN - REF.	CODE	Material		R min.	L mm	K mm	LK mm	Breaking Load N	Weight Kg/m
		Plate	Pin						
C 600	11025	CI		760	92	14.2	53.4	55000	5.22
C 600 TAB	11026								5.70
CC 600	11007	W	SS	700	90	17	54	14000	1.33
CC 600 TAB	11009								1.49
NG 600	11027	NG		700	90	17	54	12500	1.33
NG 600 TAB	11028								1.49

CI - Cast Iron

W - Acetal Resin (white) ([For further information](#))

NG - New Generation (green) ([For further information](#))

SS - Stainless Steel

Standard length:

48 pitches (10 Ft - 3.05 m)

Application:

- Transportation of plastic crates
- General purpose conveying applications

Advantages:

- High strength
- Curving radius capability
- Matt uniform finish
- Very high wear resistance



Chains Material



Sprockets



Chemical Resistance



Engineering Information



Print



Attention
